


Homestake based very large neutrino detector

Milind Diwan
Brookhaven National Laboratory

Gran Sasso conversation, Italy
3/7/2008

The concept originated ~2002 after
SuperK and Kamland discoveries.

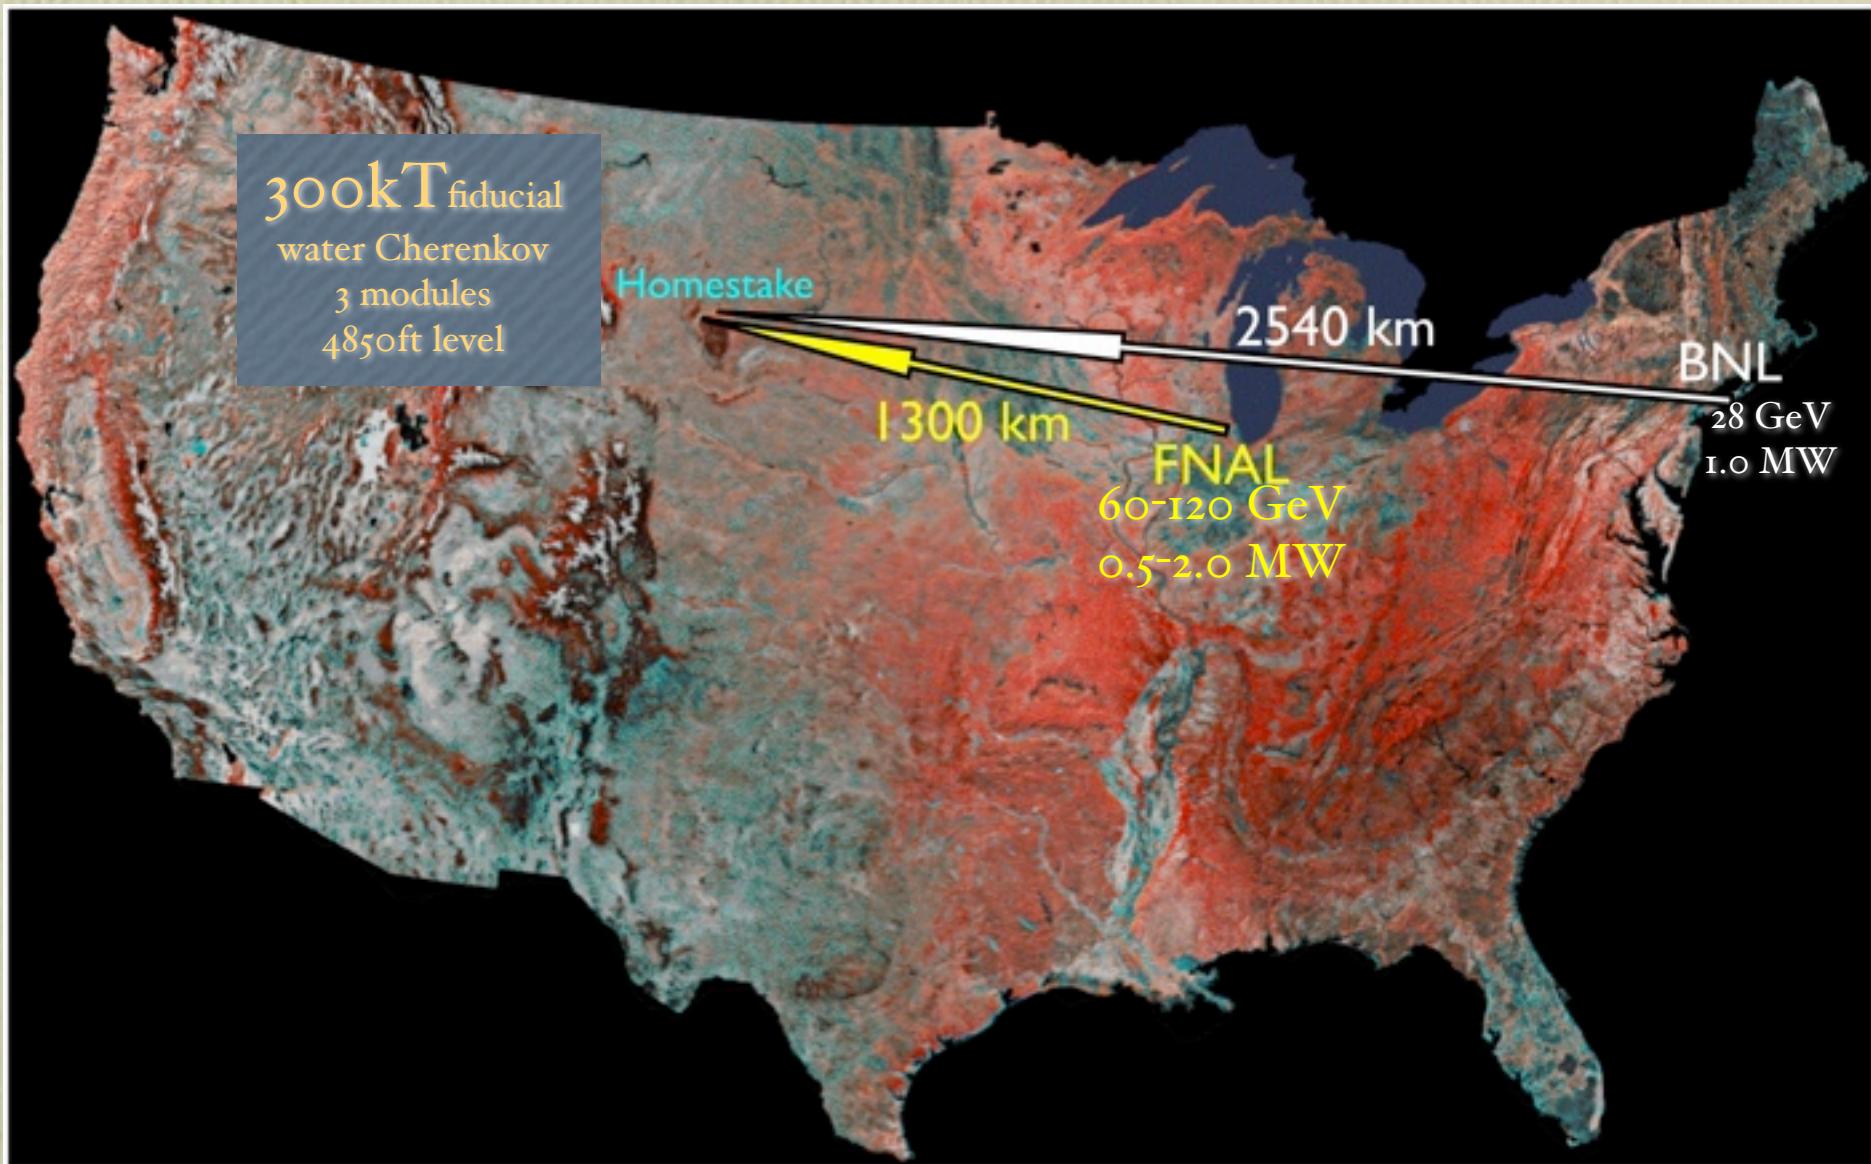

Key ideas

- Large statistics (>100k events per yr) with high energy muon neutrino beam.
- Large distance to get big matter and CP effects. Distance large enough to get both “atmospheric” and “solar” oscillation effects in single experiment.
- Broad scientific program for detector with low background and large dynamic range in energy.

Phenomenology of $\nu_\mu \rightarrow \nu_e$

The Mixing Matrix

$$U = \begin{bmatrix} 1 & 0 & 0 \\ 0 & c_{23} & s_{23} \\ 0 & -s_{23} & c_{23} \end{bmatrix} \times \begin{bmatrix} c_{13} & 0 & s_{13}e^{-i\delta} \\ 0 & 1 & 0 \\ -s_{13}e^{i\delta} & 0 & c_{13} \end{bmatrix} \times \begin{bmatrix} c_{12} & s_{12} & 0 \\ -s_{12} & c_{12} & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$c_{ij} \equiv \cos \theta_{ij}$
 $s_{ij} \equiv \sin \theta_{ij}$

$$\times \begin{bmatrix} e^{i\alpha_1/2} & 0 & 0 \\ 0 & e^{i\alpha_2/2} & 0 \\ 0 & 0 & 1 \end{bmatrix}$$


Majorana CP phases

$\theta_{12} \approx \theta_{\text{sol}} \approx 34^\circ$, $\theta_{23} \approx \theta_{\text{atm}} \approx 37\text{-}53^\circ$, $\theta_{13} \lesssim 10^\circ$


δ would lead to $P(\bar{\nu}_\alpha \rightarrow \bar{\nu}_\beta) \neq P(\nu_\alpha \rightarrow \nu_\beta)$. CP

mass-squares

Normal

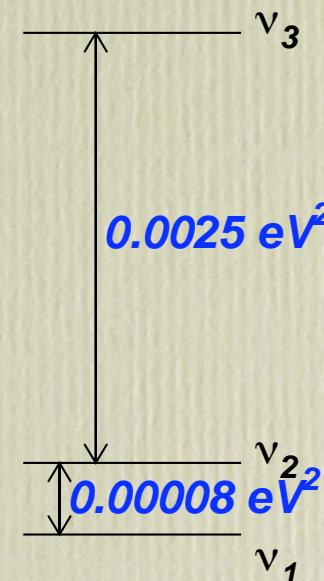

Reversed

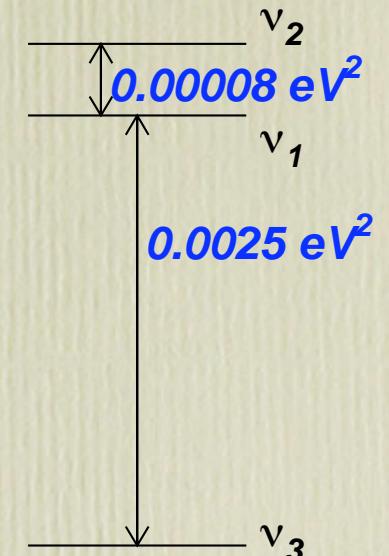

Difference in mass squares: $(m_2^2 - m_1^2)$

Oscillation nodes at $\pi/2, 3\pi/2, 5\pi/2, \dots (\pi/2)$: $\Delta m^2 = 0.0025 eV^2$,
 $E = 1 GeV$, $L = 494 km$. Solar : L~15000km

Joint FNAL/BNL study

- Start Apr-06 in anticipation of physics urgency and DUSEL.
- Study also informed the NuSAG committee of US DOE
- Chairs: Hugh Montgomery, Sally Dawson; Committee: F. Cervelli(INFN), **M. Diwan(BNL)**, M. Goodman(ANL), B. Fleming(Yale), K. Heeger(LBL), T. Kajita (Tokyo), J. Klein(Texas), S. Parke(FNAL), **R. Rameika(FNAL)**.
- Several small workshops and ~10 documents from ~30 people on sensitivity, backgrounds, beam alternatives, etc.
- Scope of work (<http://nwg.phy.bnl.gov/fnal-bnl>)
 - ★ Accelerator intensity
 - ★ Beamline feasibility (NuMI offaxis/ to DUSEL) and rates
 - ★ Detector feasibility/Prelim. Costs/Schedule/R&D plan
 - ★ Backgrounds/Sensitivity

Two approaches

No new beam, but restricted physics because of surface det.

New beam, but detector capable of Nucleon Decay

- Off axis: Use existing NUMI beam. NOvA will be built ~10 mrad off axis for the first maximum. (100kT LAR) could be built at either 10 mrad or 40 mrad for second maximum. Detectors will be on the surface. Combine the results to extract th13, mass hierarchy, and CPV.
- Wide band Low Energy: Couple the long baseline program to a new deep underground laboratory (DUSEL). Site a large detector (~300kT if water Cherenkov or 100kT LAR) at approximately 5000 mwe. Build a new wide beam with a spectrum shaped to be optimum (0.5-6 GeV). Use detector resolution to extract multiple nodes.
- Concerns: event rate, NC background, resolution, parameter sensitivity, total cost and timeliness.

Proton Intensity at FNAL

	Now	Proton Plan	NOvA *	SNuMI	Project X	
Batch Intensity (8 GeV)	4.4×10^{12}	4.3×10^{12}	4.1×10^{12}	4.5×10^{12}	5.6×10^{13}	protons/pulse
Rep Rate	7	9	12	13.5	5	Hz
Protons/hour	1.1×10^{17}	1.4×10^{17}	1.8×10^{17}	2.2×10^{17}	1.0×10^{18}	
Main Injector batches	7	11	12	18	3	
MI batches to pbar target	2	2	0	0	0	
MI Cycle Time	2.4	2.2	1.33	1.33	1.4	sec
MI Beam Power (120 GeV)	176	338	710	1169	2314	kW
8 GeV Beam Power (available)	18	17	16 *	0	206	kW
Injection energy into 1st synchrotron	400	400	400	400	8000	MeV


From: FNAL Steering group report.

M.Diwan

Beam from FNAL


Flexibility of proton energy:

After
Collider

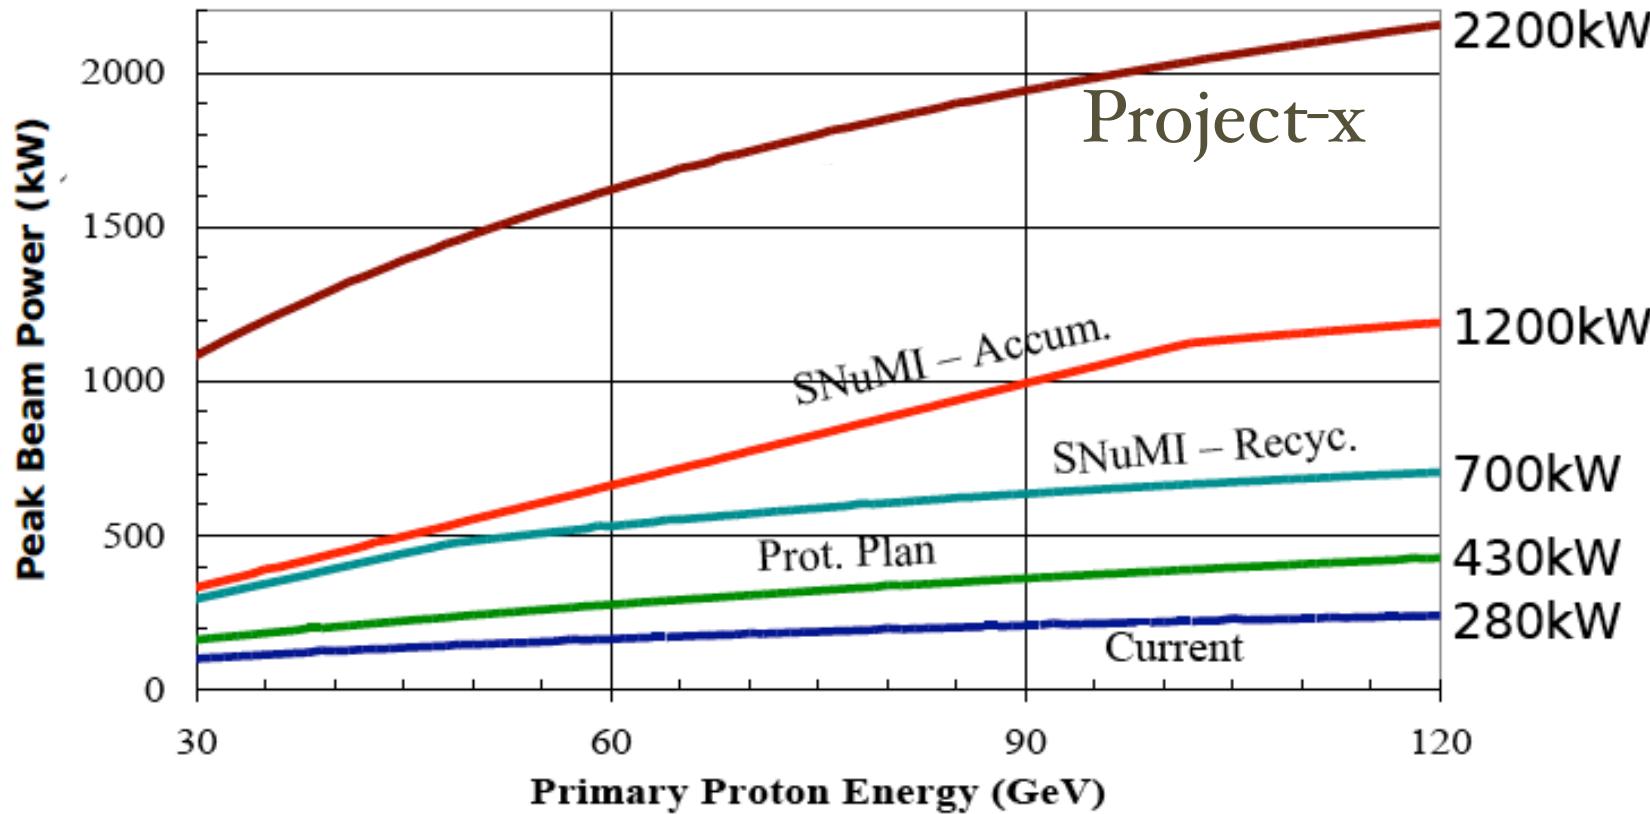


$$1 \text{ MW} * 10^7 \text{ sec} = 5.2 \cdot 10^{20} \text{ POT at 120 GeV}$$

$$1 \text{ MW} * 130 \text{ hrs/week} * 42 \text{ weeks} = 10.2 \cdot 10^{20}$$

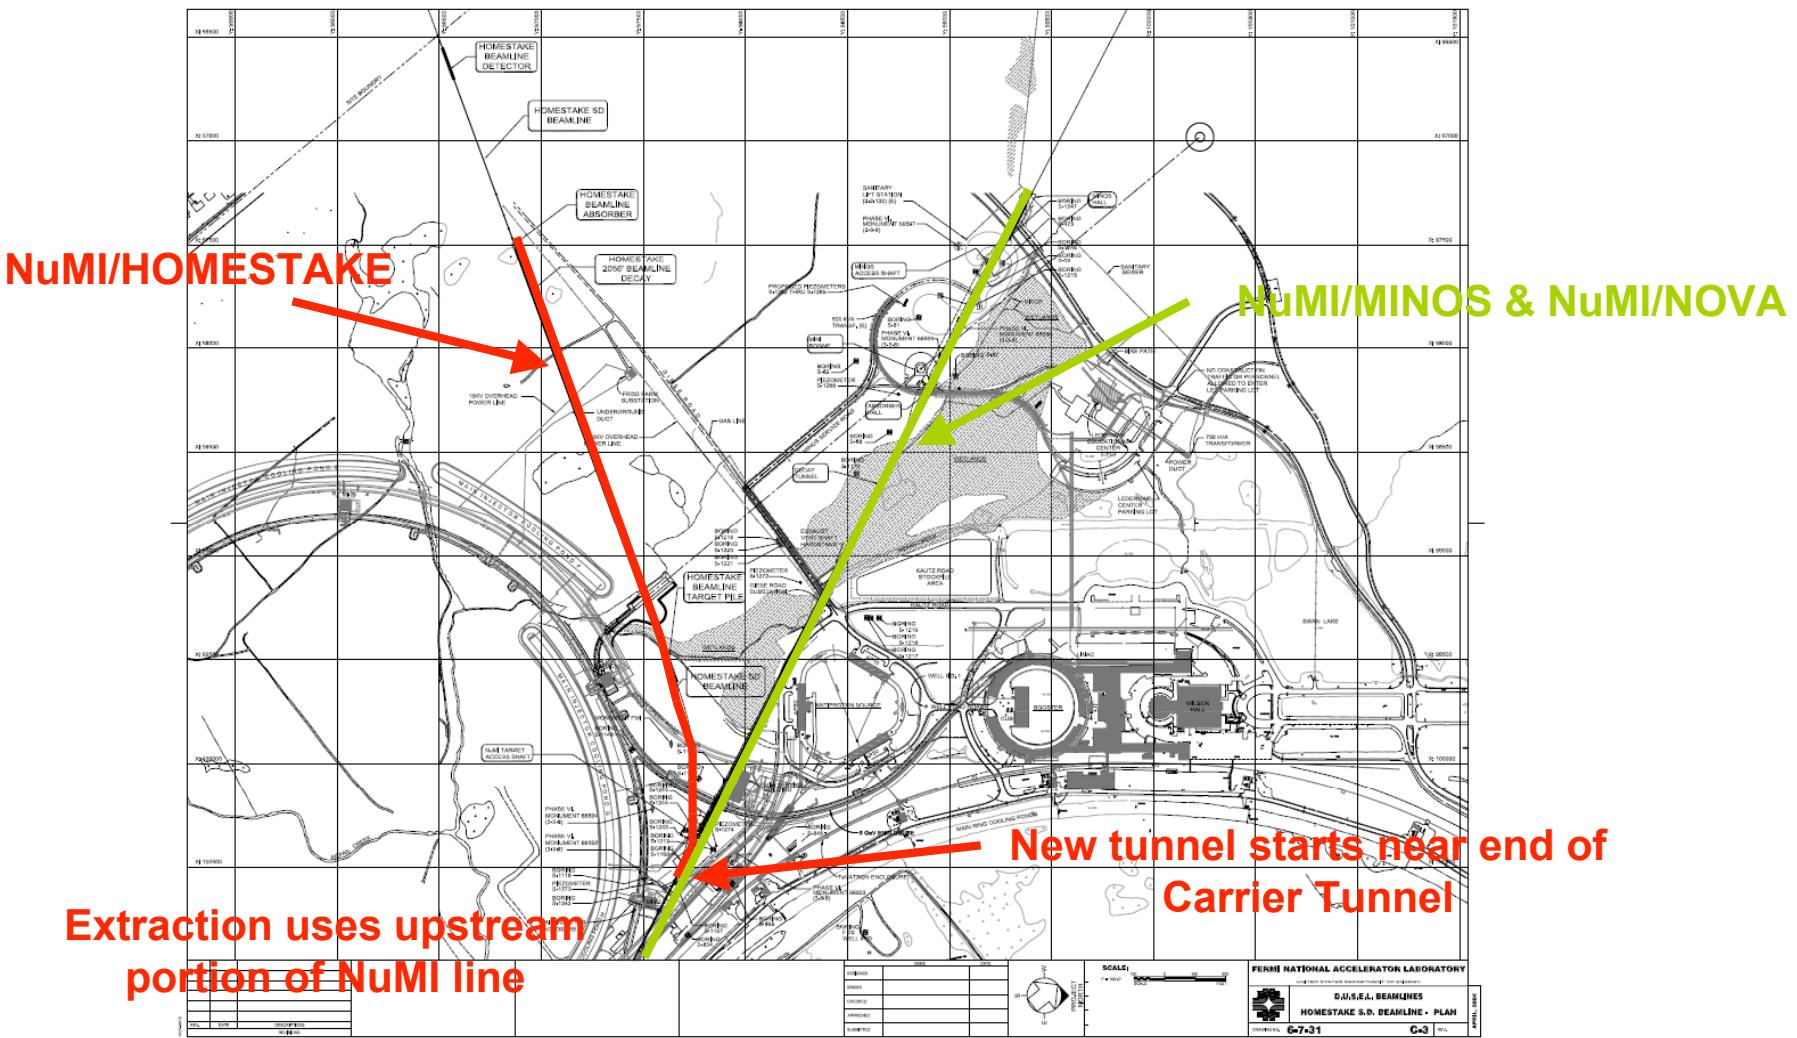

- Use the present extraction out of Main Injector into NuMI
- Second tunnel to transport protons west starts near lower Hobbit door in present line.
- Radius of curvature same as MI for 120 GeV using conventional magnets.
- New target station: R&D needed beyond 1 MW.


Elevation View

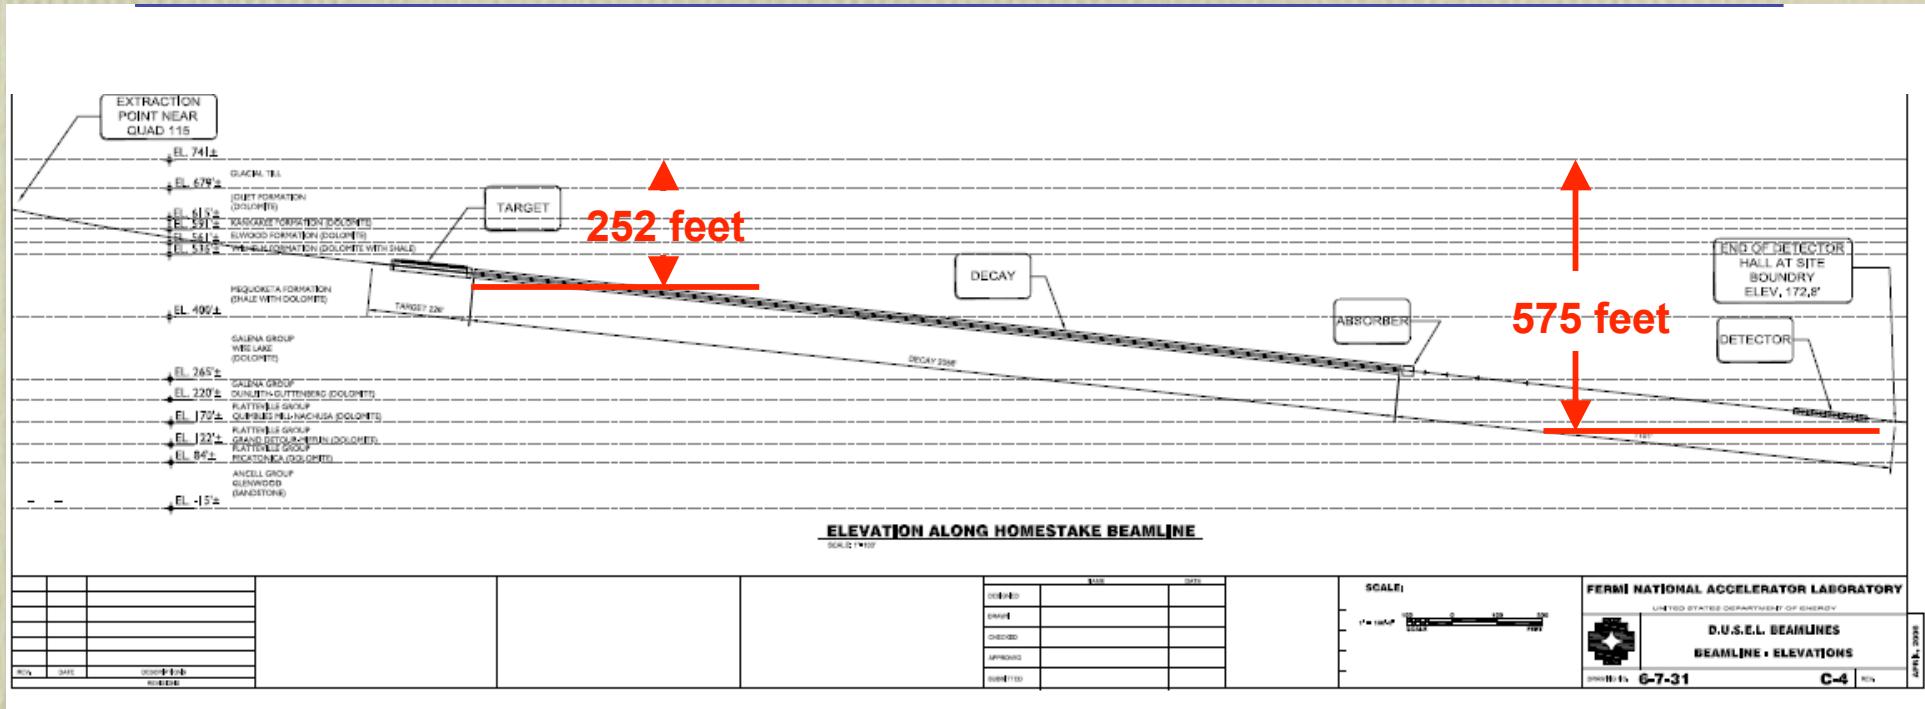


This elevation view of the Homestake Beamlne (-5.84°) is drawn to take the detector to the site boundary at Kirk Road. The maximum decay pipe length available in this configuration is about 627m (compare to NuMI at 675m). The detector hall (and shaft) is about 575 feet deep (compare to MINOS at about 336 feet). This is still in the Galena-Platteville but deep.

Spectra FNAL to DUSEL (WBLE: wide band low energy)

numu cc (param) 1300km / 0km

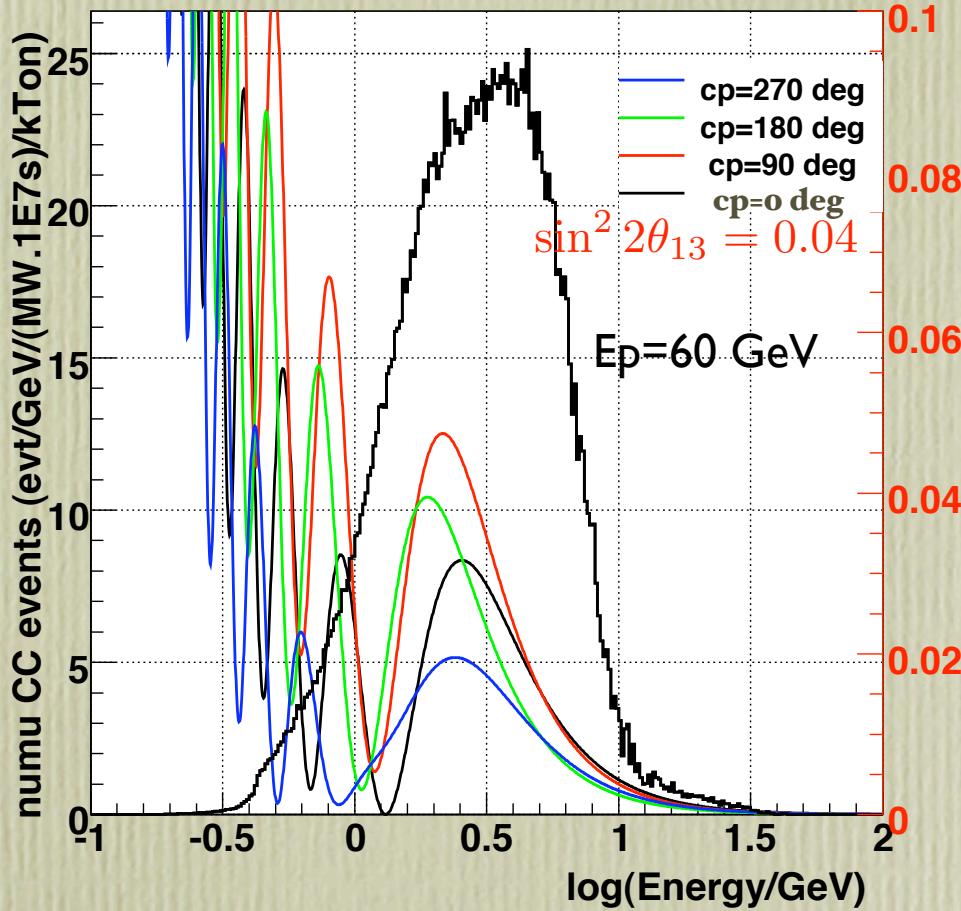

numu cc (param) 1300km / 12km

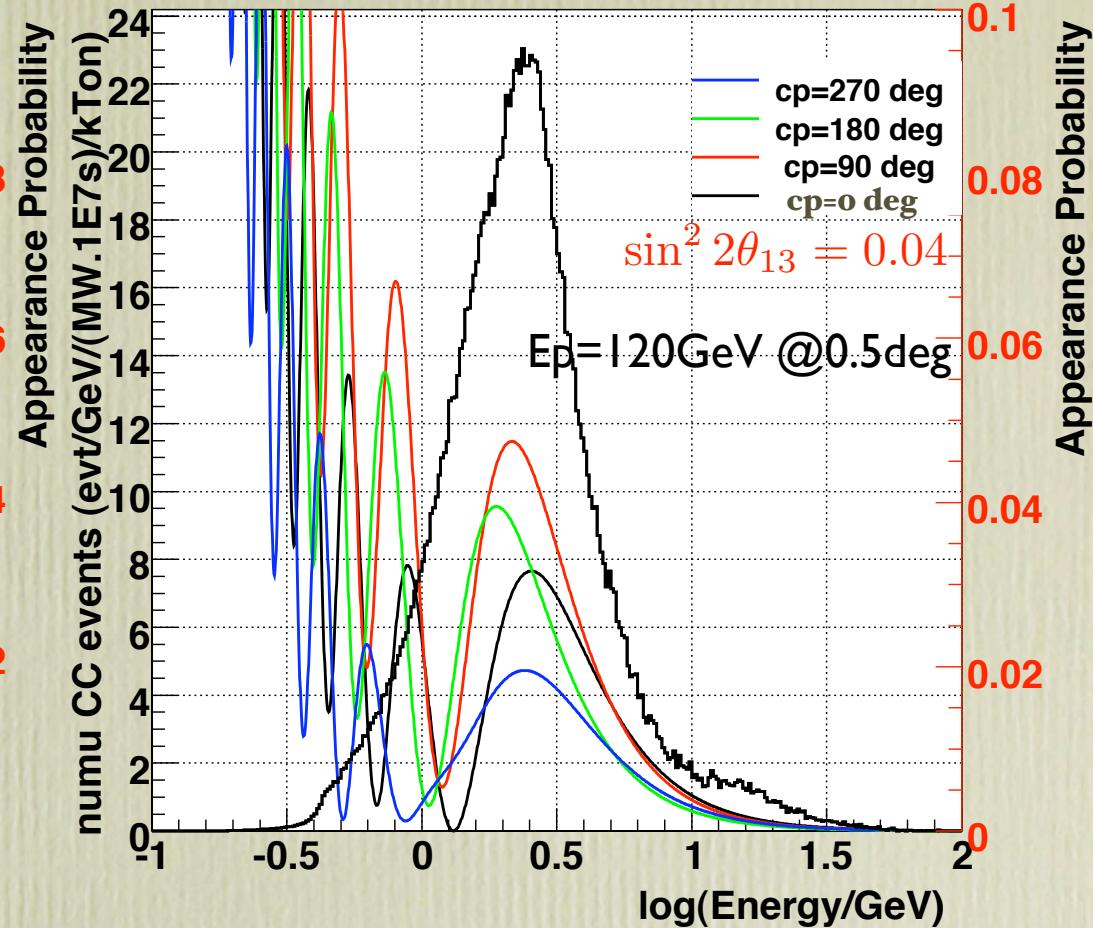

- 60 GeV at 0deg: CCrate: 14 per ($kT * 10^{20}$ POT)
- 120 GeV at 0.5deg:CCrate: 17 per($kT * 10^{20}$ POT)

Work of M. Bishai and B. Viren using NuMI simulation tools.

M.Diwan

$\nu_\mu \rightarrow \nu_e$ rate in $100kT^*IMW^*10^7$ sec

$$\Delta m_{21,31}^2 = 8.6 \times 10^{-5}, 2.5 \times 10^{-3} eV^2 \quad \sin^2 2\theta_{12,23} = 0.86, 1.0 \quad \sin^2 2\theta_{13} = 0.02$$

δ_{CP}

	$sgn(\Delta m_{31}^2)$	0 deg	+90 deg	180 deg	-90 deg
NuMI-15mrad (810km)	+	76	36	69	108
NuMI-15mrad (810km)	-	46	21	52	77
WBLE (1300km)	+	87	48	95	134
WBLE (1300km)	-	39	19	51	72

$\sin^2 2\theta_{13}$	Events NuMI 12km 0CP, (+)	Frac. diff. wrt (-)	Frac. diff. wrt 90CP
0.02	76	0.25	0.36
0.1	336	0.23	0.15

Matter effect

CP effect

- Normalization: $|M_W| \cdot 100kT \cdot 10^7 \text{ sec}$
- Significance for CP violation is different from matter effect. For large θ_{13} it is only weakly dependent on θ_{13}

Detector design considerations

- Need ~100kT efficient mass
- Signal ~50events/year
- 100kT \rightarrow 50m $\varnothing \times$ 50m h
- Cosmic rate in $10\mu\text{s}$ for 10^7 pulses.
- If detector on surface need rejection of $\sim 10^8$ for muons and $\sim 10^4$ for photons \rightarrow fully active fine grained detector.

Depth (mwe)	Intime cosmics/ year
0	5×10^7
1050	4230
2000	462
3000	77
4400	15 DUSEL

Detector technologies

Water Cherenkov

- Known, successful technology with wide dynamic range (5 MeV-50GeV).
- Can perform both p-decay, astrophysical sources, and accelerator nus.
- R&D on large caverns already in progress. PMT R&D and costing in progress.
- Can be deployed deep scaled up: 50kT to fewX100kTon.
- **MODEST DEVELOPMENT
NEEDED FOR PROPOSAL.**



Liquid argon

- Substantial R&D needed to scale current 0.3 kT (ICARUS) to 100kT.
- Solution needed deep deployment. Can proton decay physics or other non-accelerator physics be done near surface.
- Must demonstrate 10^8 rejection of cosmics as well as data rate capability.
- **Aggressive successful R&D is needed to mount a proposal in 5 yrs.**

Detector at Homestake

Modular Detector

- ~53m dia/h
- 100kT fiducial
- 4850 mwe
- 25% PMT cov.
- 12 inch PMT
- cosmic ~0.1 Hz

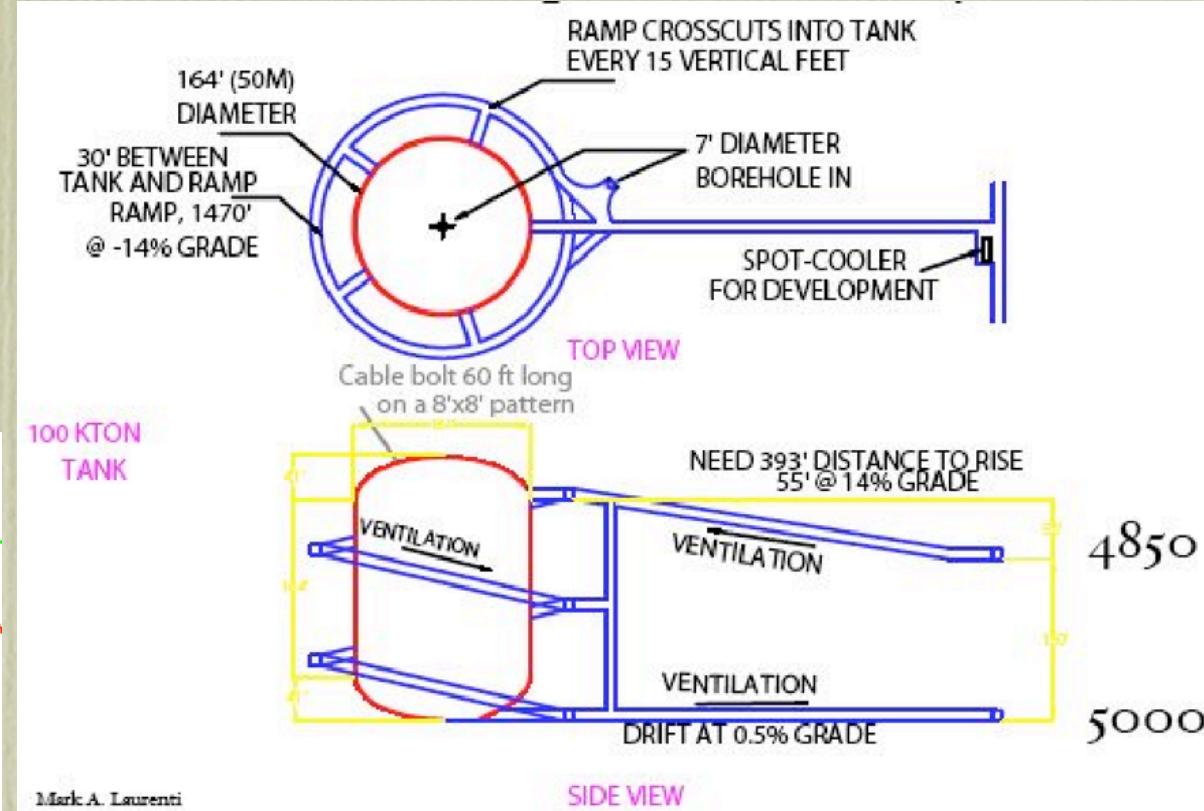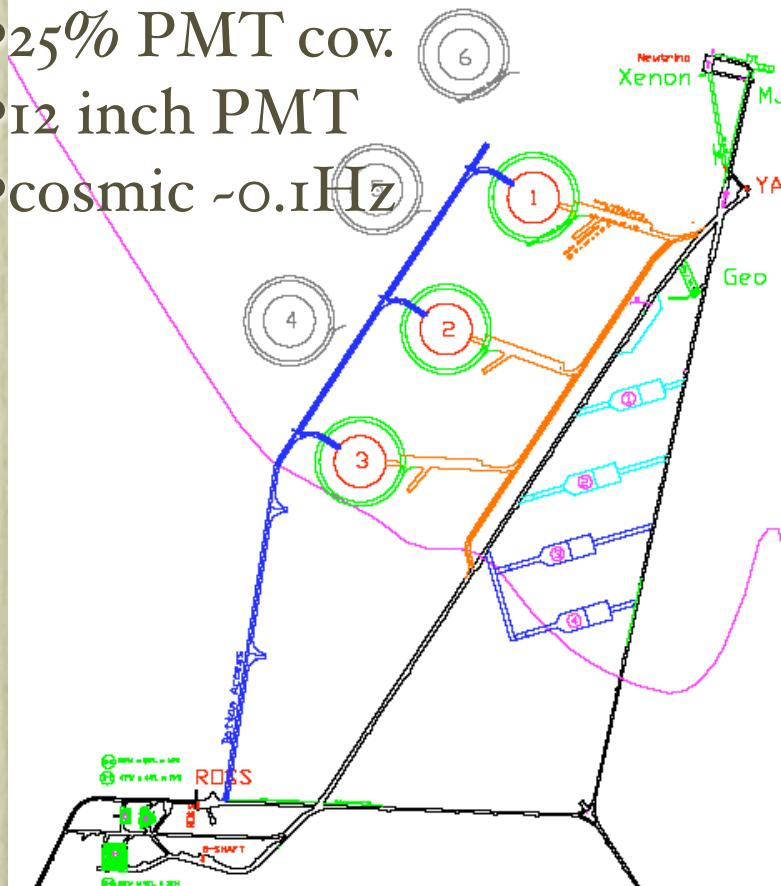

Studies ~50m cavity stable in HS rock



- ✓ Initial detector 3 modules
- ✓ Space can be planned for 10
- ✓ Cost estimate \$115M/module
- ✓ 6 yrs construction to first 100kT
- ✓ 8 yrs to full 300 kT.

Fiducial vol depends on rock stability studies and PMT pressure rating.

Water Cerenkov Simulation

The ν_{atm} simulation of SuperKamiokande is used.

An π^0 reconstruction algorithm called “Pattern Of Light Fit” is used as input to a likelihood (DLH) analysis to reconstruct $\pi^0 \rightarrow \gamma\gamma$ by looking for the 2nd ring. Independent studies by Chiaki Yanagisawa for FNAL-DUSEL WBB and Fanny Dufour for T2KK produce similar efficiency for signal and background.

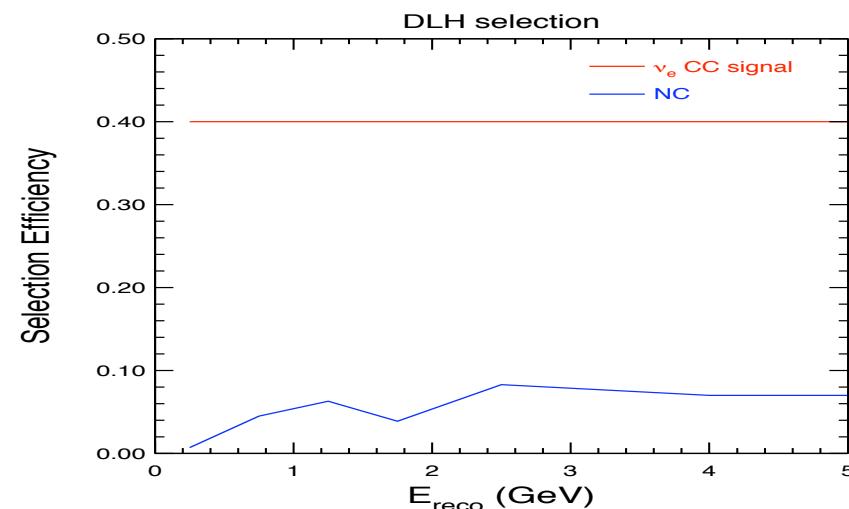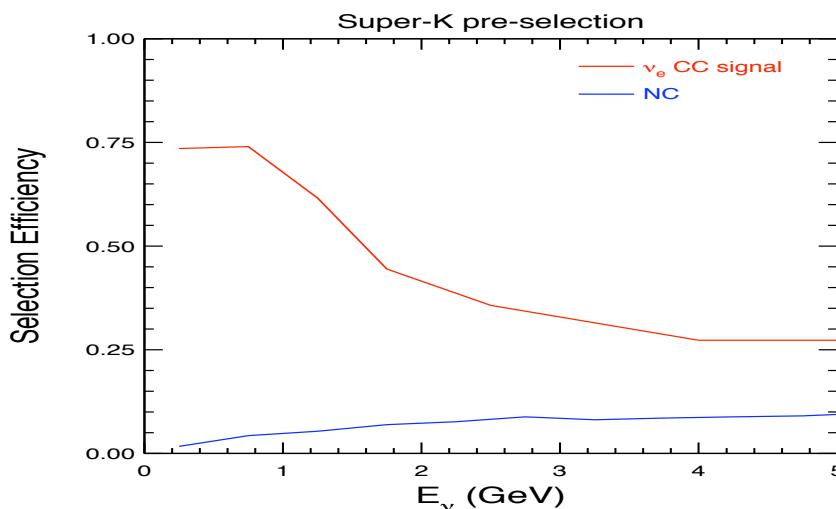

For total eff. and rej. multiply these plots together
Standard Super-K pre-selection efficiencies DLH selection efficiencies (Chiaki Y.)

WCe. energy dependent efficiencies and smearing implemented in GLoBeS.

LARTPC

www-lartpc.fnal.gov

B. Fleming, D. Finley, S.Pordes, et al.


- The LAR group has shown an advantage of about a factor 4 over a water Cherenkov detector of equal mass due to better background rejection. There is no easy automated event analysis, however.
- A 50 m high/dia tank on surface has 500 kHz of rate. LARTPC could take data around beamtime, but still need rejection of 10^8 on muons and $10^3\text{-}10^4$ on gammas. This needs further work.
- Aggressive R&D path is needed including argon purity, industrial tank technology, readout geometry and signal/noise. First step : 1 kT before cost and schedule could be properly evaluated. Current scaling law is $\$2.7M + \$0.3M/kT + \$1M/kTon$ (for LAR).
- Lower bound on 100 kT cost ~\$200M ?
- For $p \rightarrow K^+ \nu$ decay mode depth might be needed simply for data rate, and most likely for background.
- Such a detector can be placed at either NuMI off-axis or DUSEL.

Electron neutrino appearance spectra

$\sin^2 2\theta_{13} = 0.04$, 100kT LAr., WBLE 120 GeV, 1300km, 30E20 POT.
 $(-\delta_{cp} = -45^\circ, -\delta_{cp} = +45^\circ)$

- LAR assumptions
- 80% efficiency on electron neutrino CC events.
- $\text{sig}(E)/E = 5\%/\sqrt{E}$ on quasielastics
- $\text{sig}(E)/E = 20\%/\sqrt{E}$ on other CC events

Spectra and sensitivity is the work of Mark Dierckxsens and Patrick Huber + many helpers

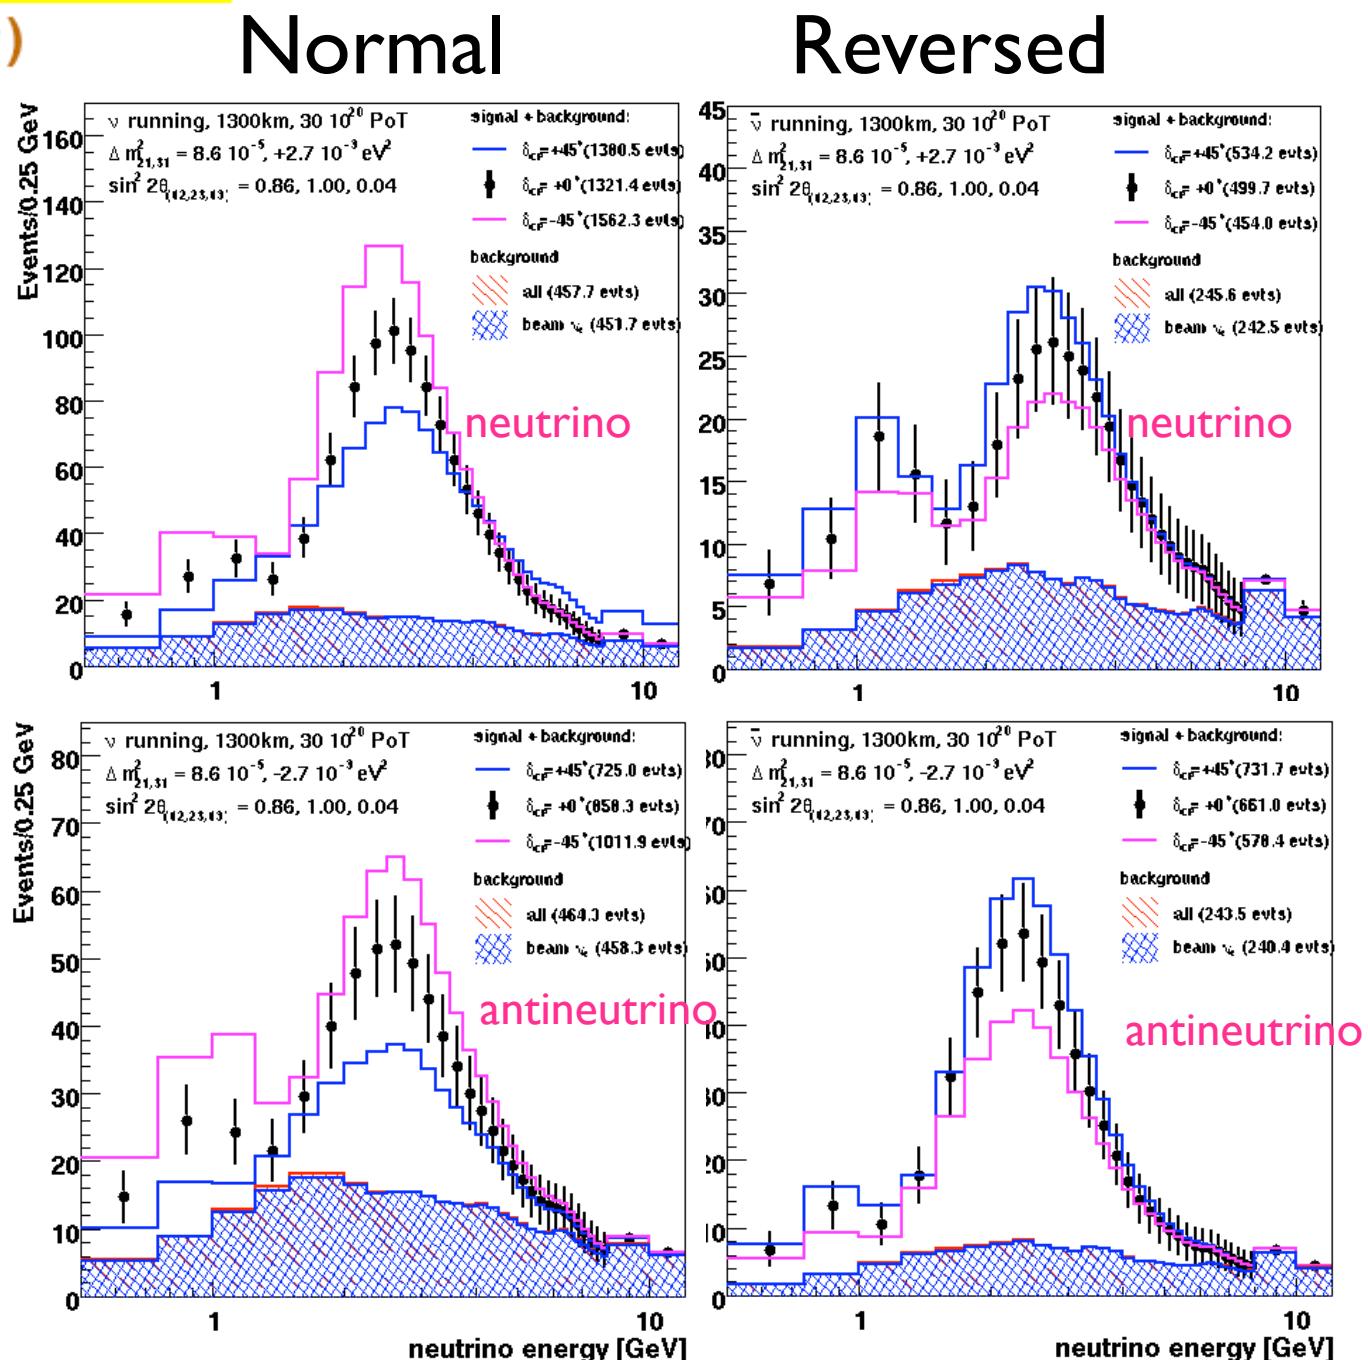


Electron neutrino addearance spectra

$\sin^2 2\theta_{13} = 0.04$, 300kT WCe., WBLE 120 GeV, 1300km, 30E20 POT.




($-\delta_{cp} = -45^\circ$, $-\delta_{cp} = +45^\circ$)

- All background sources are included.
- S/B ~ 2 in peak.
- NC background about same as beam nue backg.
- For normal hierarchy sensitivity will be from neutrino running.
- For reversed hierarchy anti-neutrino running essential.
- Better efficiency at low energies expected with higher PMT counts.

Normal



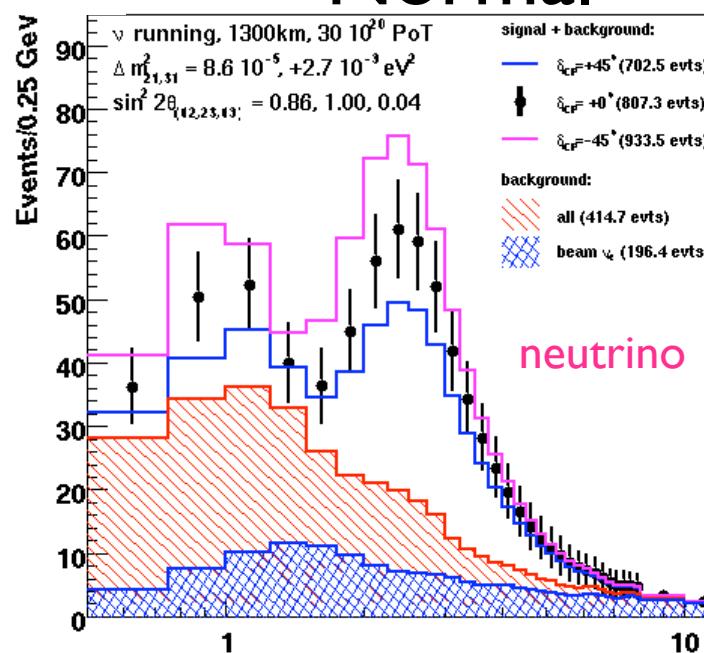


Reversed

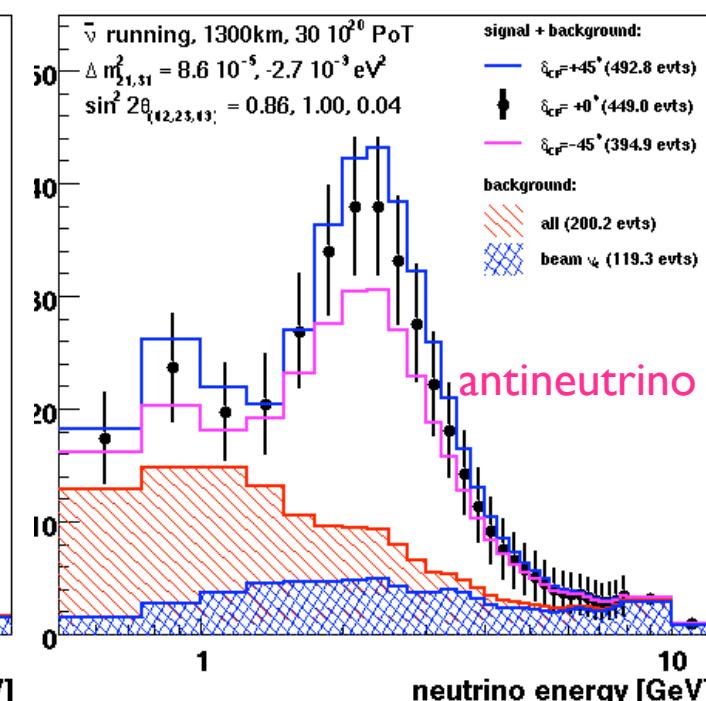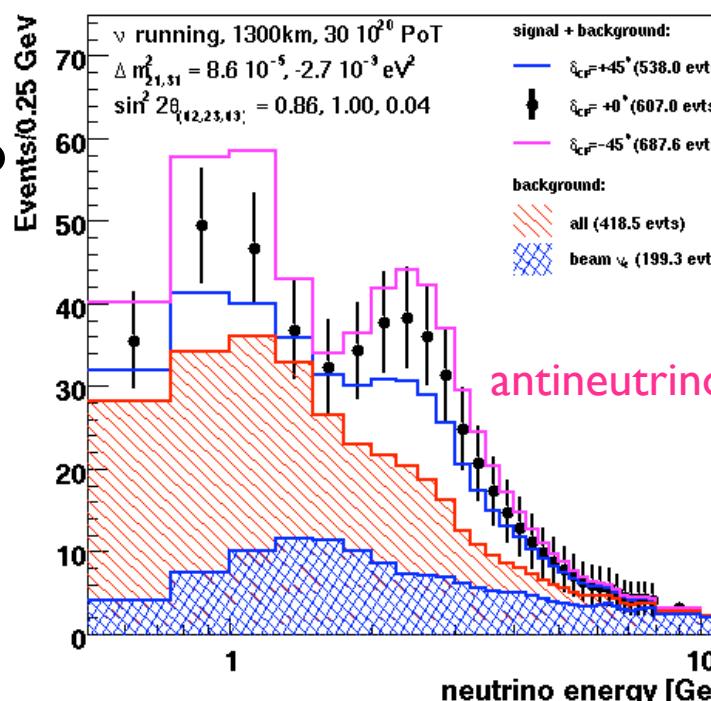
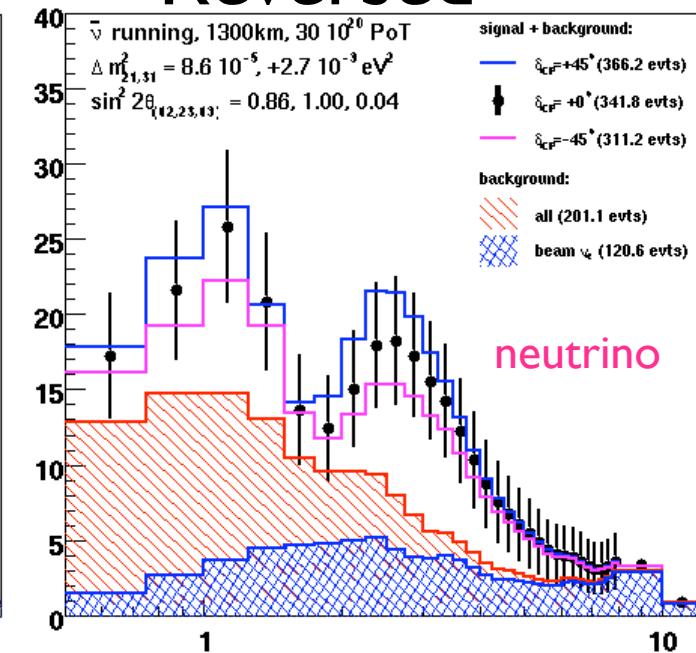


WBLE FNAL to DUSEL (1300km)

Discovery potential (-5σ – -3σ). LAr. 100 kT , 1.2 MW, 6yrs:

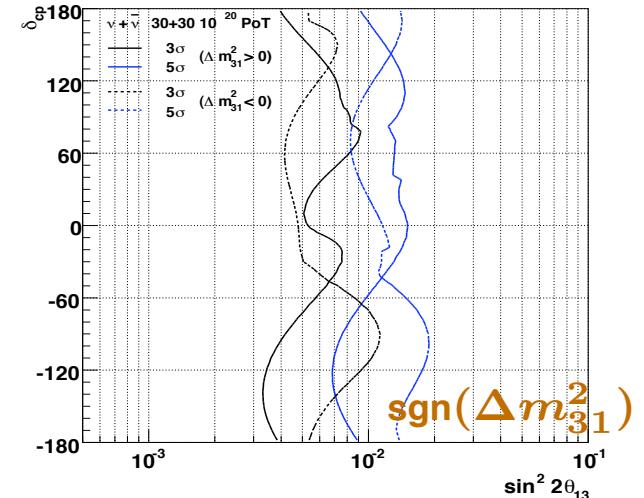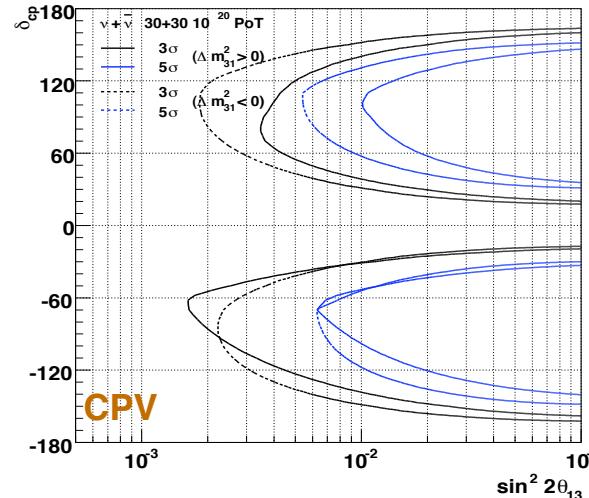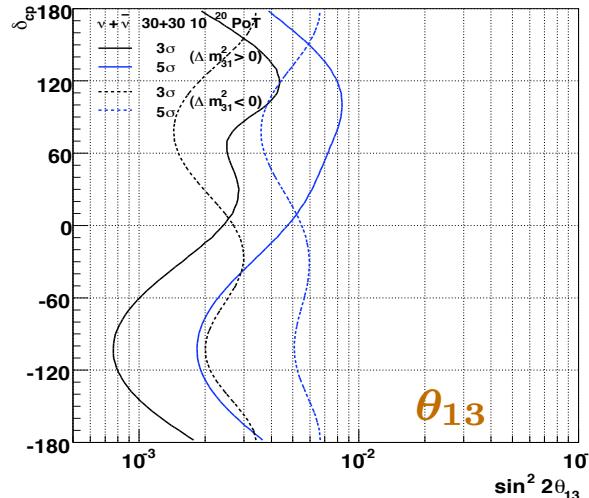

Measurement ($-95\% \text{ CL}$ – $-68\% \text{ CL}$):


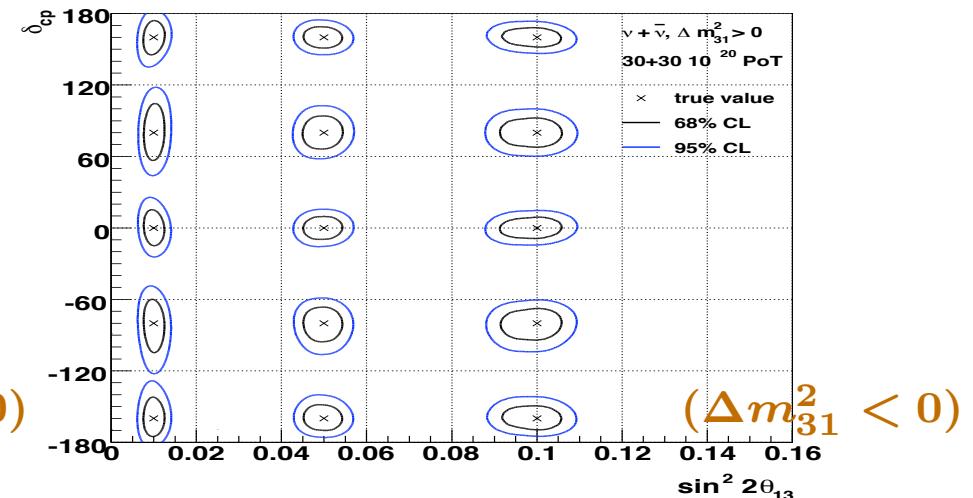
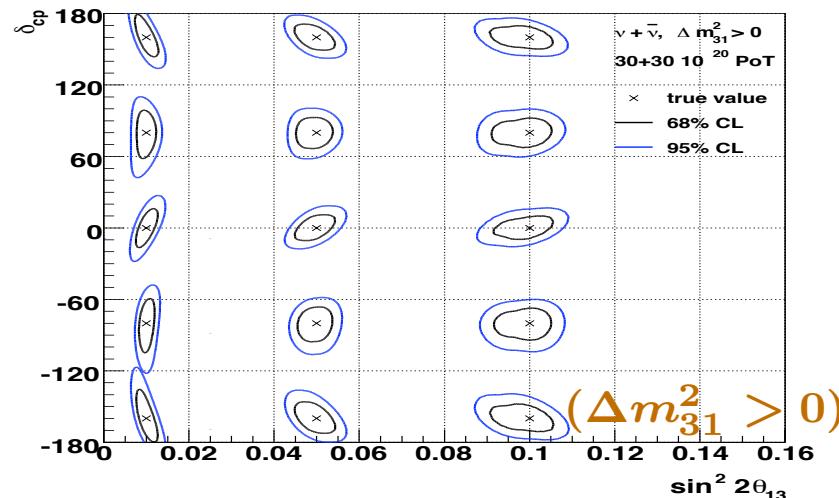


Ultimate Reach 300 kT water

60 GeV, 2MW, 3+3 yrs, 300kT

CP Violation

Mass ordering

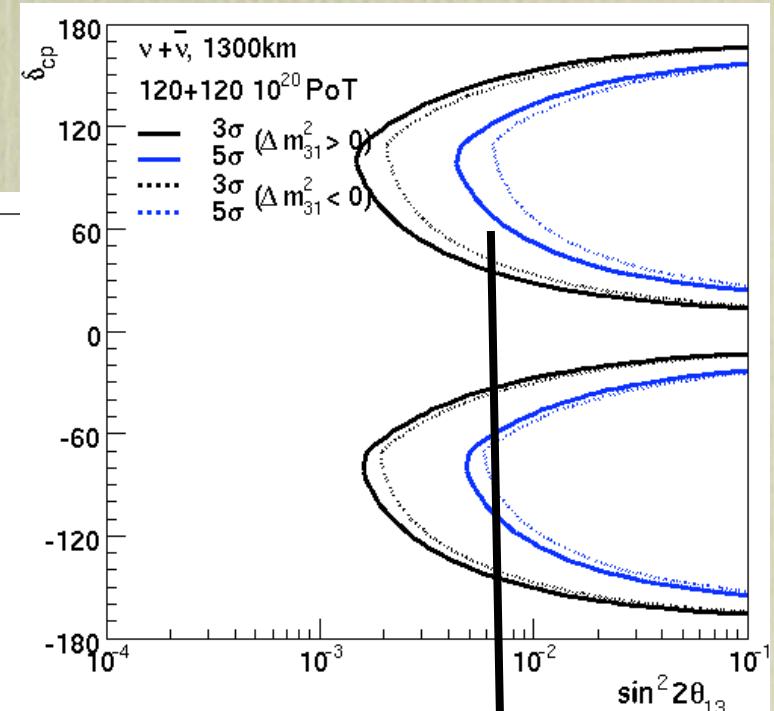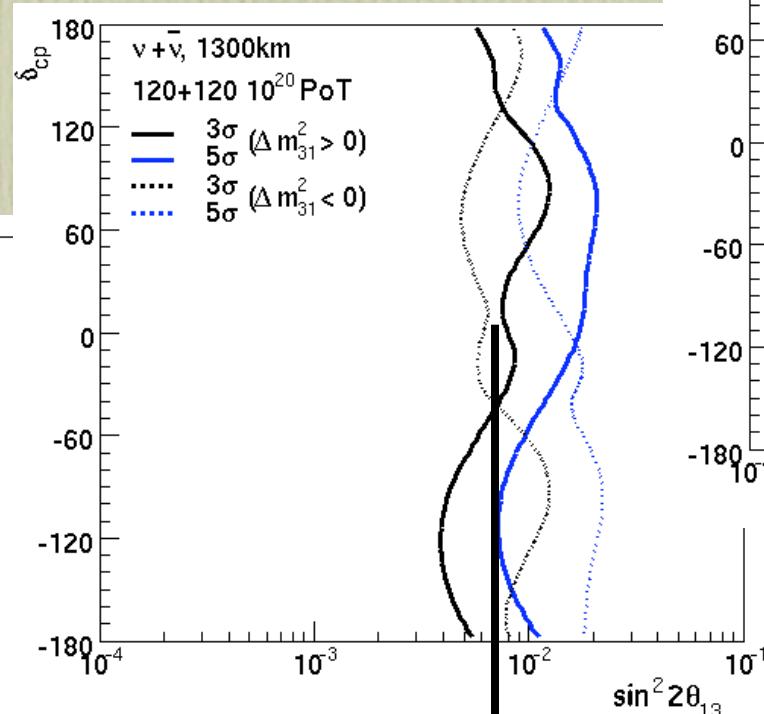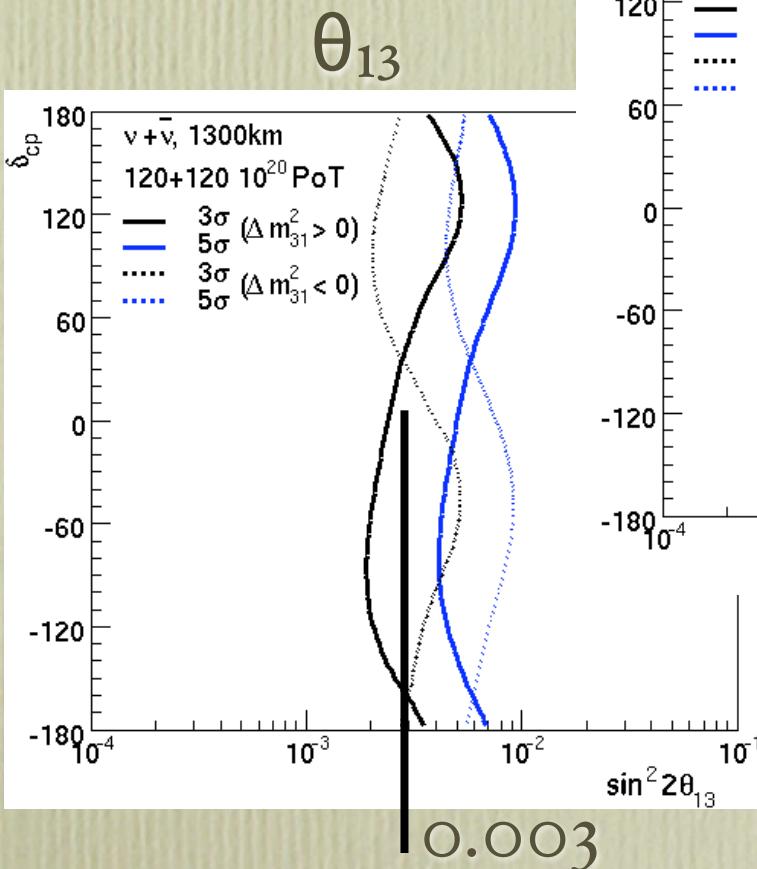


0.007 50% coverage at 3 sigma

stat+ 5% syst

Technical issues

- Program should lead to measurement of 3-generation parameters without ambiguities. (recall: CP measurement is approximately independent of θ_{13}). Need large detector independent of θ_{13} value.
- A narrow band program cannot overcome ambiguities easily.

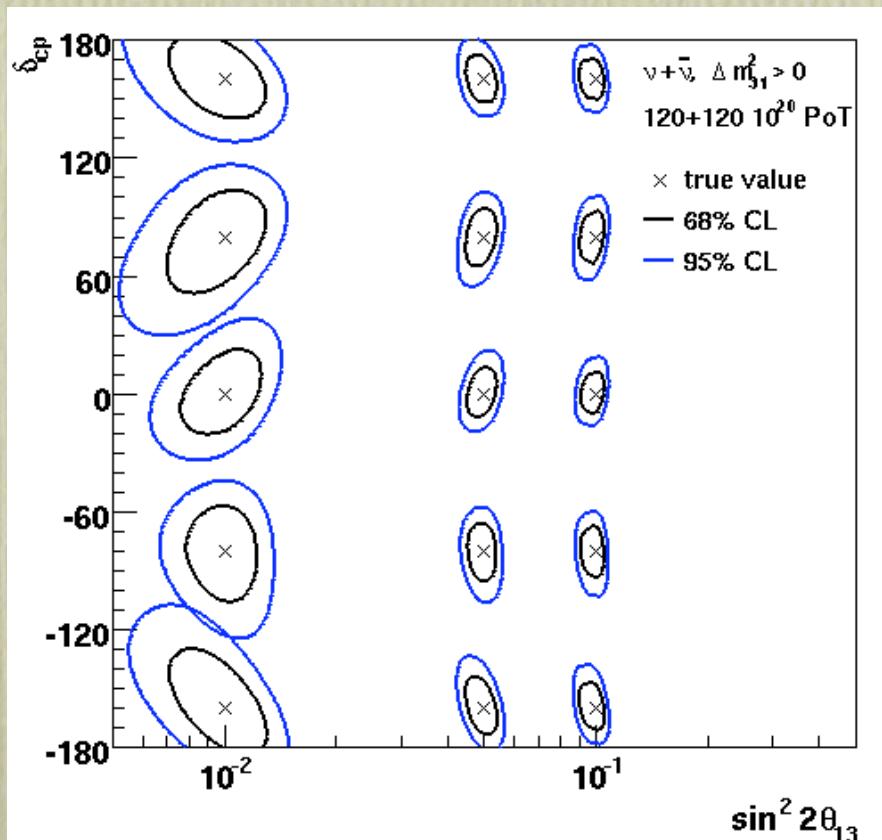

300 kT water Cherenkov detector
@DUSEL
Measurement of CP phase and
 $\sin^2 2\theta_{13}$ at several points. All
ambiguities and mass hierarchy are
resolved.

Intermediate proposal

- ~100 kT fiducial detector at Homestake with rock mechanics studies starting in fall of 2008.
(Homestake Interim Lab. now exists, SuperK and SNO experience and success gives confidence in feasibility and performance.)
- New wide band beam from FNAL (pre-Project x)
- Focus on θ_{13} , and mass hierarchy.
- Get started on CP violation, p-decay, Supernovae.

$\sin^2 2\theta_{13} = 0.04$, 100kT, 1300 km, ~ 1 MW 120 GeV (0.5deg)


3yrs neutrinos, 3yrs antineutrinos

($-\delta_{CP} = -45^\circ$, $-\delta_{CP} = +45^\circ$)




Spectra with 100 kT detector and 1 MW beam from FNAL

Total rate of CC neutrino events
 ~ 18 k/MW/yr
 noosc/raw evts

Normal

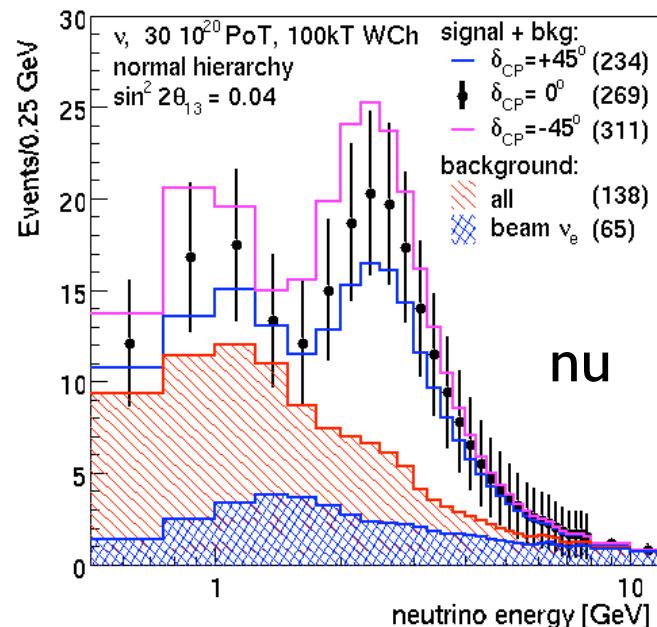


Reversed

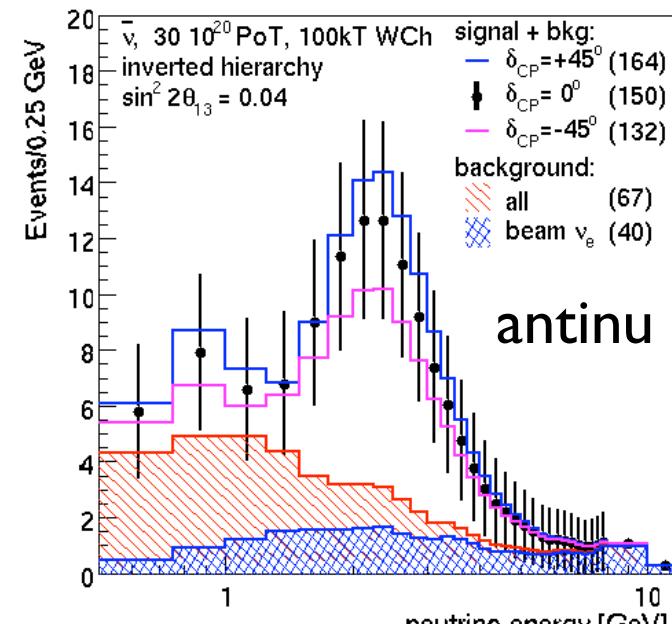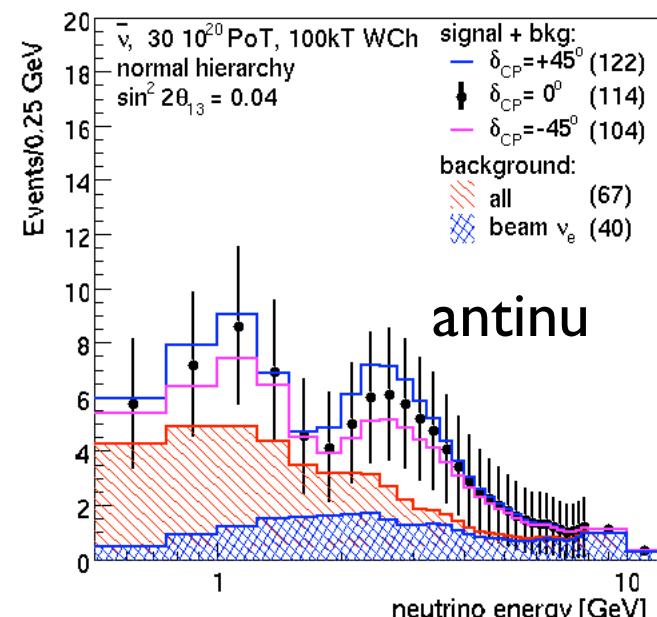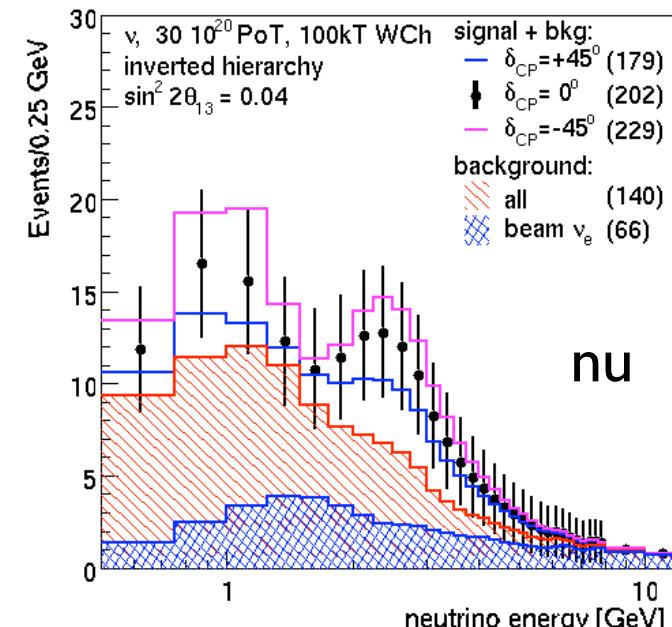

Reach with 100 kT water Cherenkov


60 GeV, 1MW, 3+3 yrs, 100kT

θ_{13}

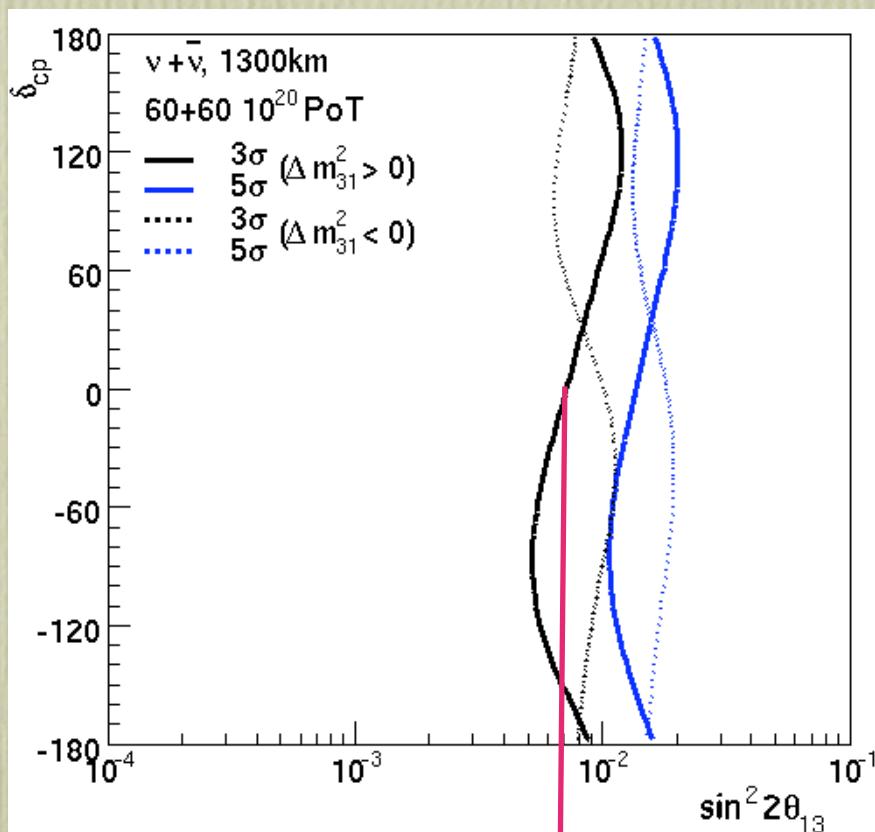

0.008


Mass ordering

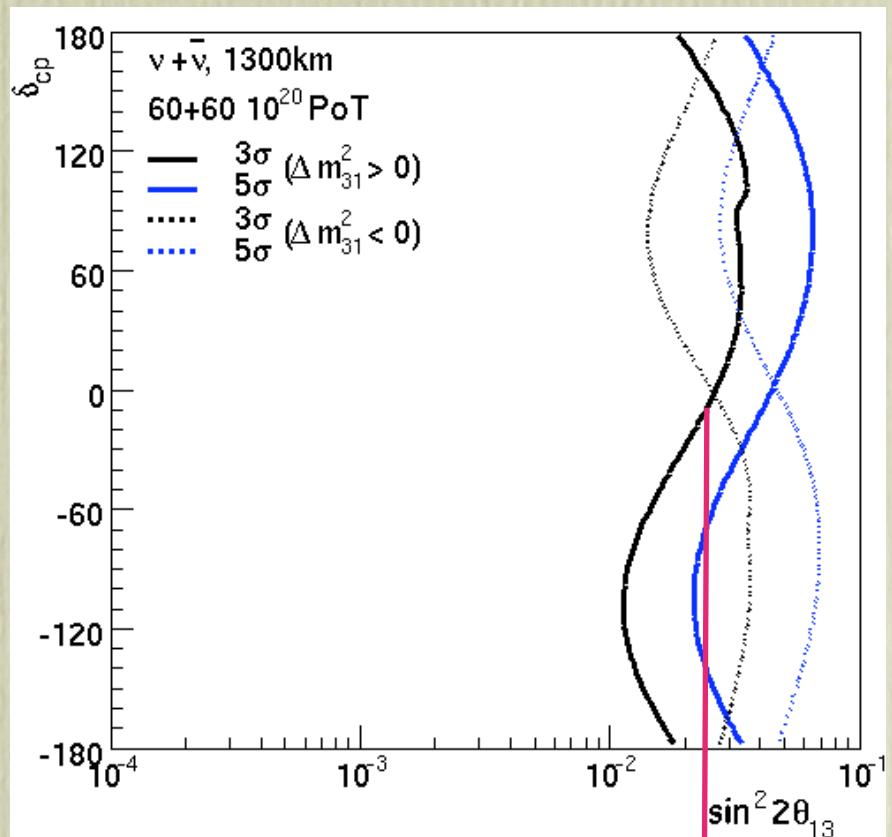


0.025

50% coverage at 3 sigma stat+5% syst

Same plots detail

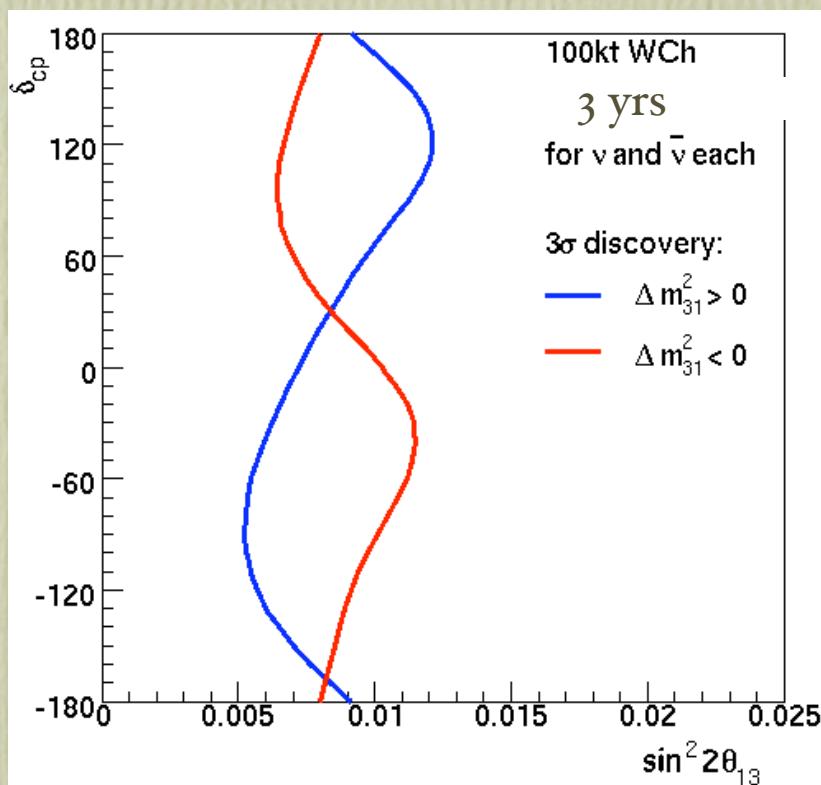

θ_{13}

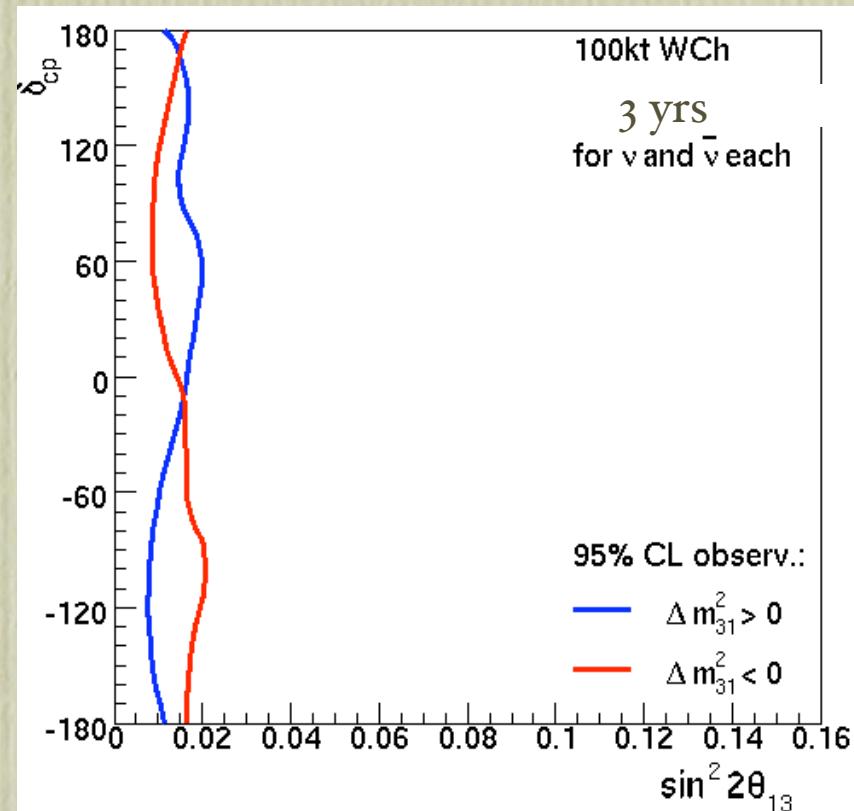


Mass ordering @ 2 sigma

★ Same exposure in $MW^* 10^7$ sec as previous plot

Measurement of CP with 100kT water Cherenkov at Homestake


There are no ambiguities for each of these test cases with test points at the X

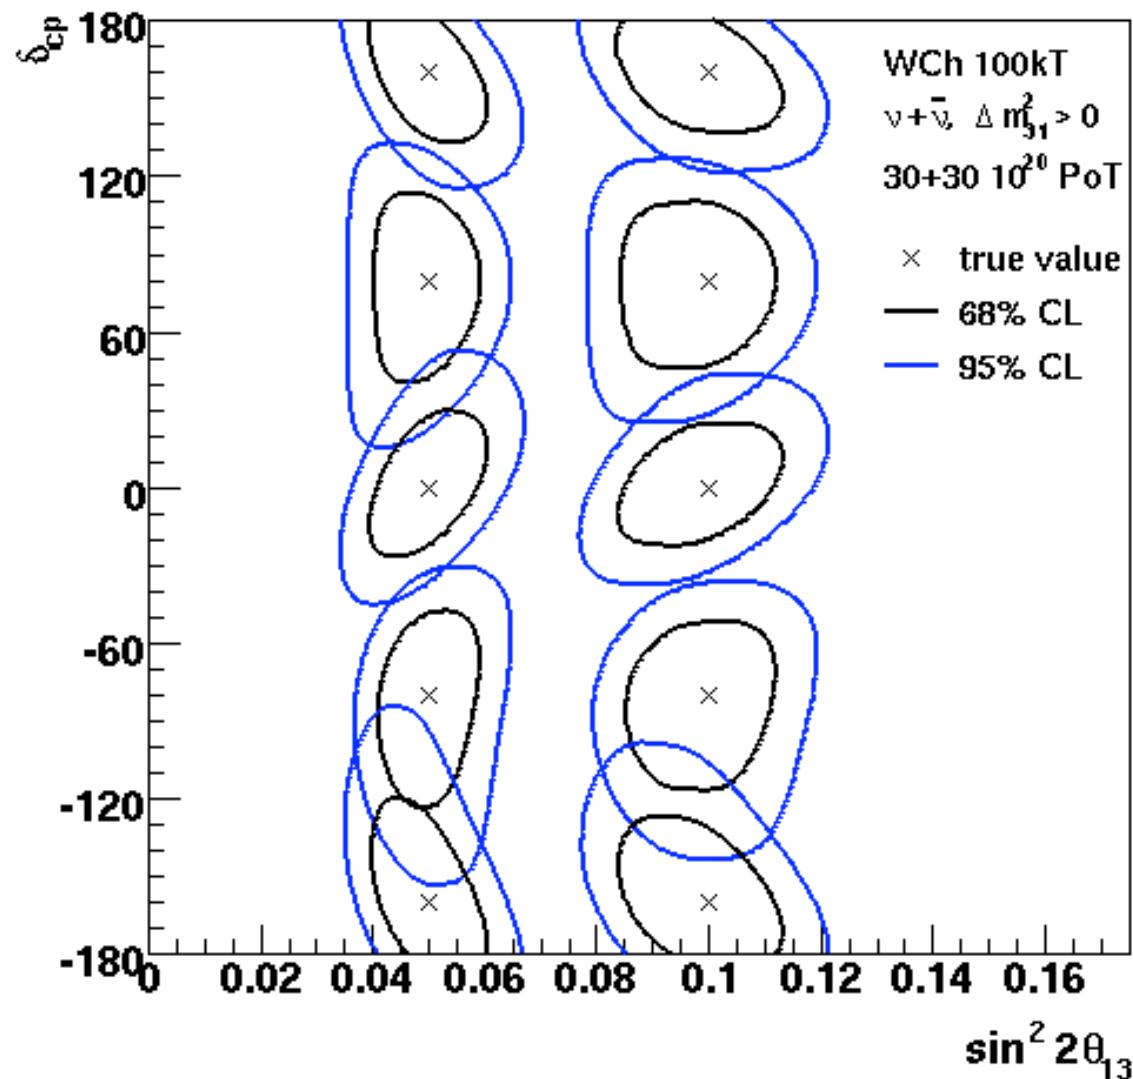


The Homestake project can lead to early CP violation indications.

MEGATON MODULAR MULTI-PURPOSE NEUTRINO DETECTOR

✓ Chamber Design

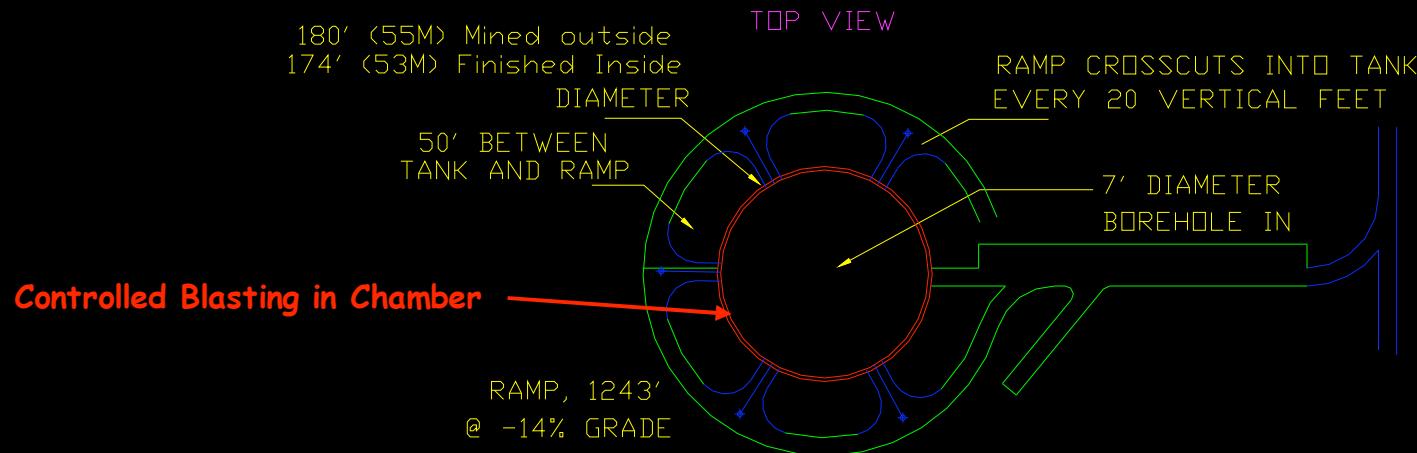


Could use Instrumented Cables
for Engineering / Geotechnical
Study

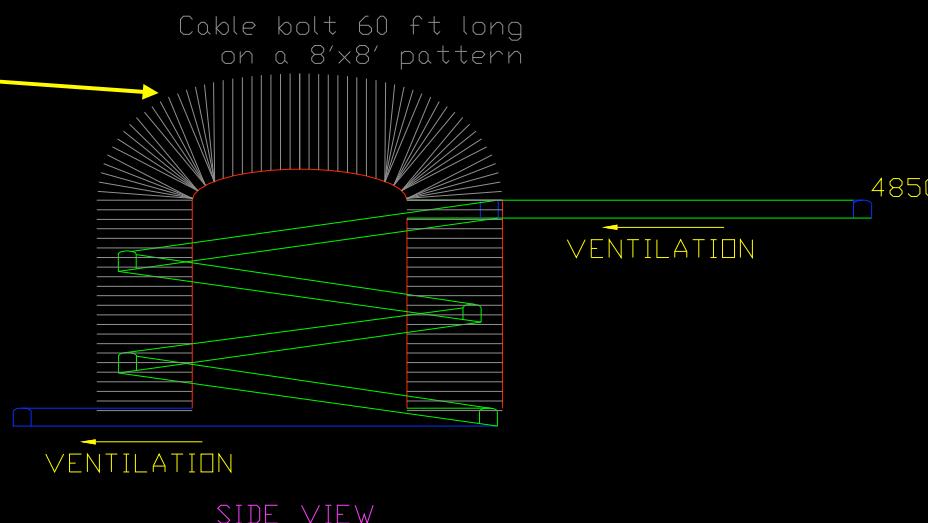

MEGATON MODULAR MULTI-PURPOSE NEUTRINO DETECTOR


✓ Modular Configuration

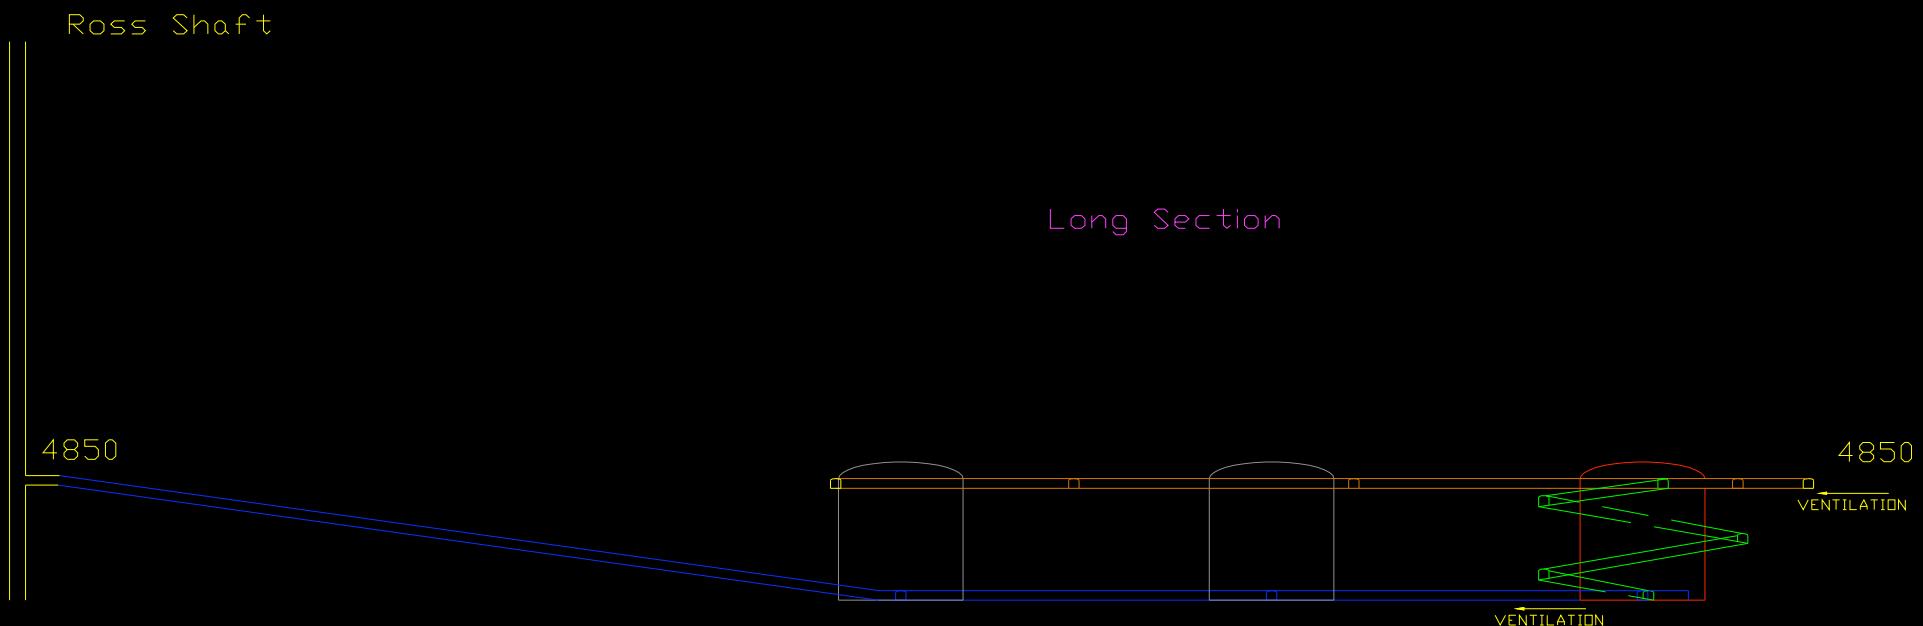


MEGATON MODULAR MULTI-PURPOSE NEUTRINO DETECTOR

✓ Modular Configuration

muon rate/cavern $\sim 1/10$ Hz

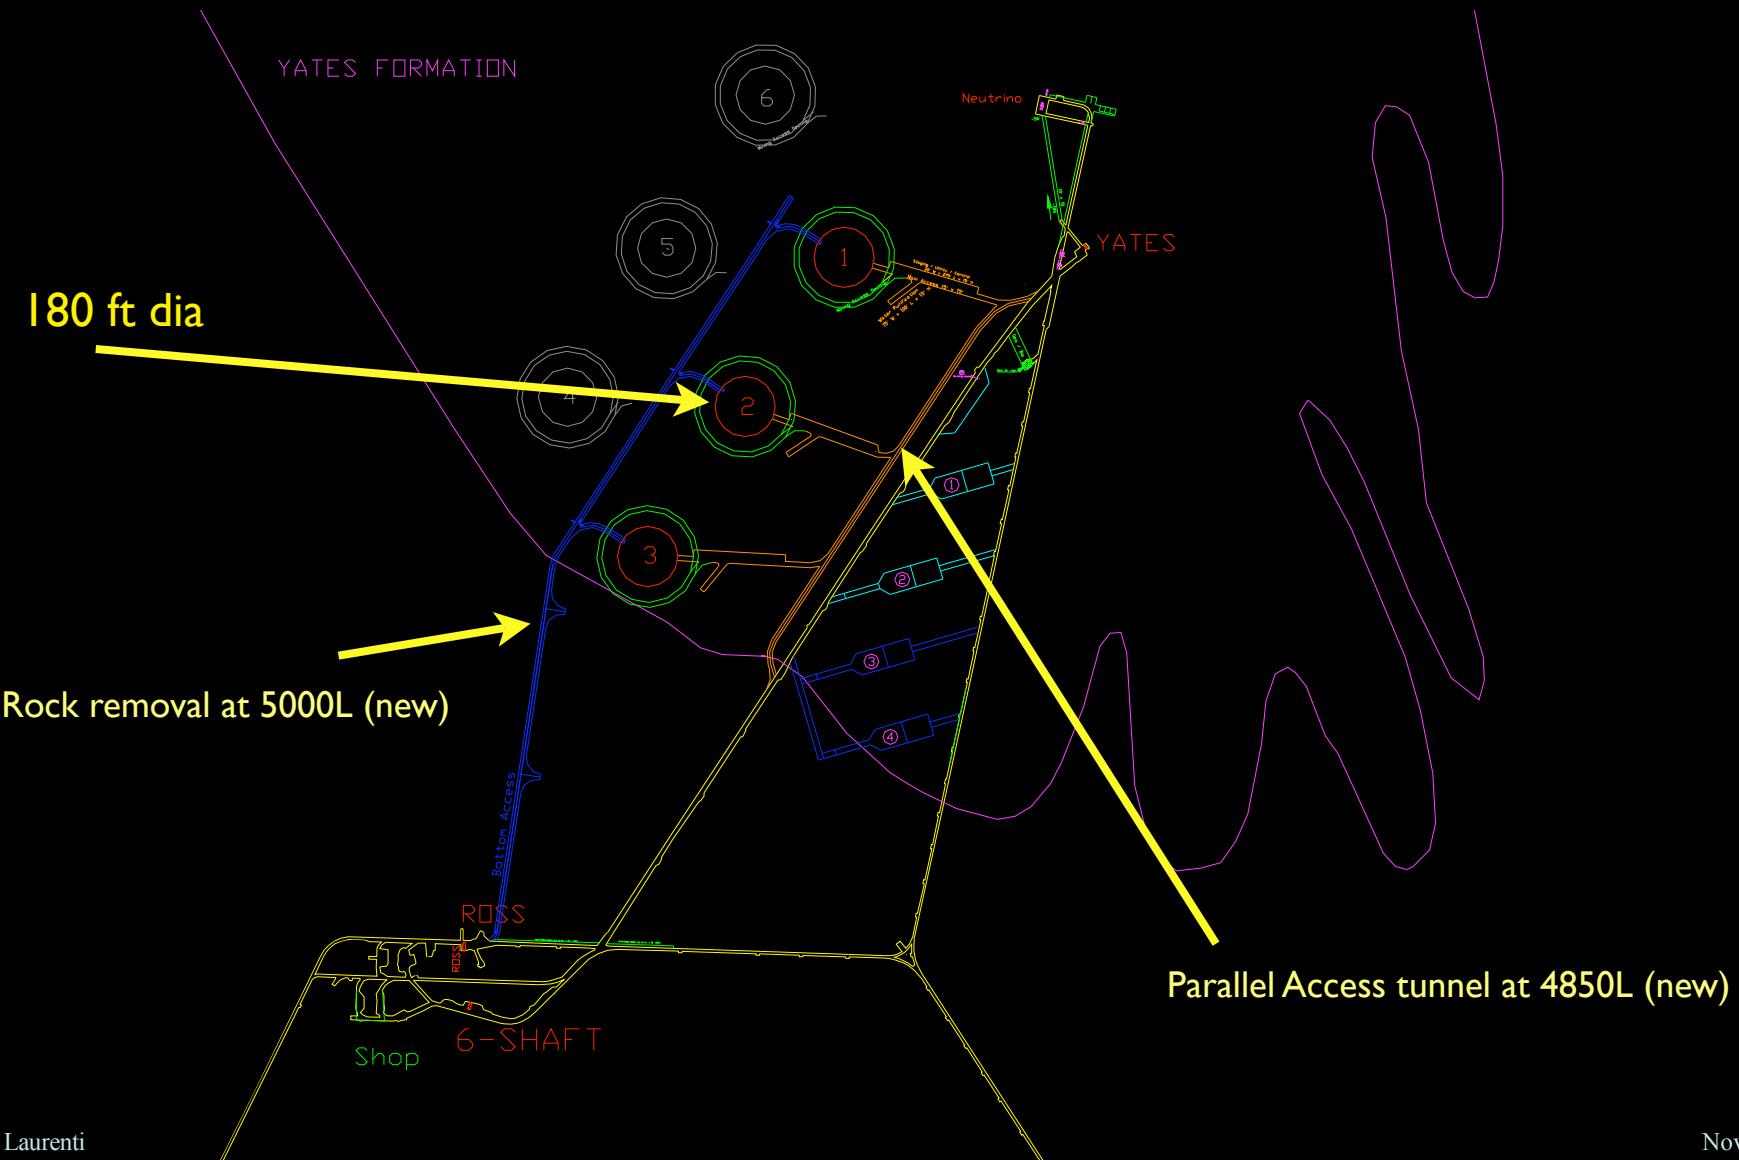

Technically limited schedule for a single 100 kT fiducial detector

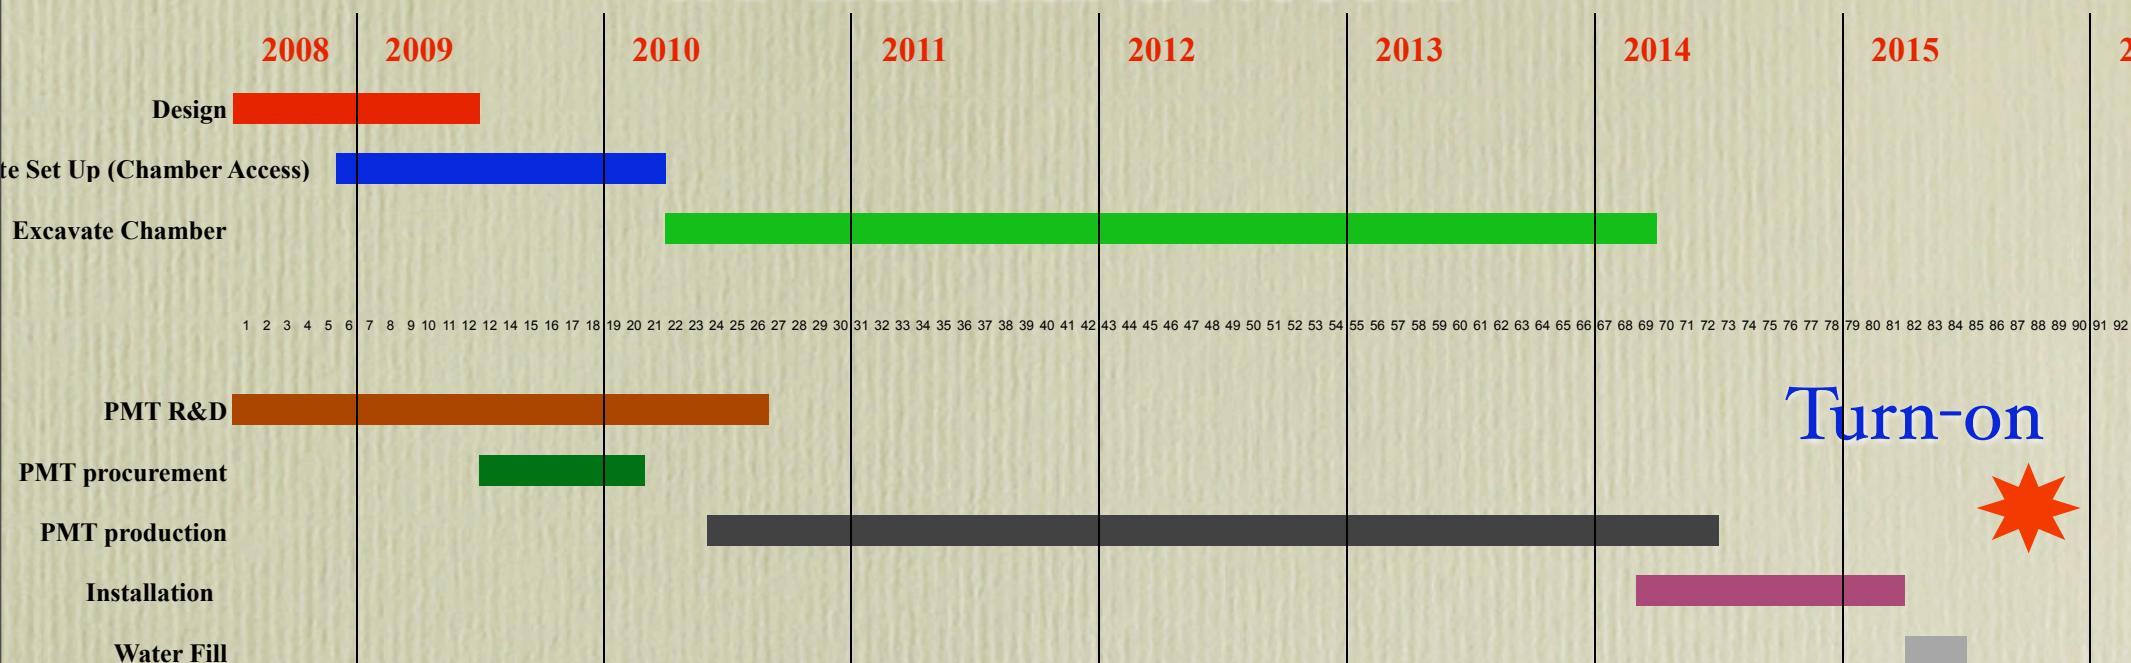

Comments: Phototube production is slowed down to match construction of 1 module only.
Schedule is strictly technical. Does not account for review process. See KTLesko talk
PMT testing facility, water system procurement and installation, and other items are not shown here.

- Tube production is slowed to match excavation. Tube production is NOT the limiting factor.
- For simplicity, water system, PMT testing, electronics, etc. are not shown.
- For 300 kT the time need not be tripled.

One time costs over next 3 yrs

- IookT estimate on next page does not include R&D and one time costs that are needed to establish the entire facility for the megaton-class detector.

Item	Cost	Source
Chamber design and coring	\$0.76M	Laurenti
Access tunnels	\$4.5M	Laurenti
Contingency	\$2.6M	50% of above
Mining + other equip.	\$10.0M	Laurenti
PMT+Elec. R&D	\$4.0M	Prel. Eng.+Subcontracts
Water/materials R&D	\$2.0M	Preliminary
Contingency (non-civil)	\$3.2M	Equip. has quotes
Total	\$27.1M	FY2007

Summary cost for 100kT (do not triple for 300kT)

Item	Cost	Source
Single Cavity construction	\$28.1M*	Laurenti
contingency 30%	\$8.4M	Preliminary Reviews
PMT(50000 chan)	\$46.7M	Auger, NNN05, etc.
Electronics, cables	\$10.65M	UPenn+SNO
Installation	\$8.75M	Conceptual
Water, DAQ, testing, etc.	\$11.4M	Quote, made for 300kT
Contingency(non-civil)	\$25.0M	>30% for some items
Total	\$139M	FY2007

* Cost and schedule reviewed by RESPEC, does not have rock disposal

Conclusion

- 100kT detector could be ready for physics by mid decade (~2015).
- Unique physics capability in the world. Excellent sensitivity for θ_{13} and mass ordering.
- Get started on much larger program for CP violation, Nucleon decay, and Supernova physics.
- Subsequent caverns could house different technology: better PMTs, Liquid Scintillator, Liquid Argon ...

SUMMARY OF CHAMBER EXCAVATION

	TOTAL	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
Chamber (1)								
Cost / Chamber \$ 28,059,334								
	\$ 28,059,334	\$ -	\$ 6,980,751	\$ 6,547,486	\$ 6,815,666	\$ 6,816,318	\$ 899,113	\$ -
Top Cut (40 ft high)	84,820 Tons	-	84,820	-	-	-	-	-
Ramp Top to Bottom	1,737 ft	-	1,737	-	-	-	-	-
Bench Tons	356,310 Tons	-	-	127,170	101,970	127,170	-	-
Cable Bolt Feet	275,840 ft	-	41,780	64,480	69,360	85,240	15,000	-
Shot Crete	1,800cuYd	-	1,800	-	-	-	-	-
Concrete Panels	2,376	-	-	486	950	670	270	-
Bore Hole Feet	174 ft	-	-	174	-	-	-	-
Months	49	-	12	12	12	12	1	-
Labor	\$ 12,983,488	\$ -	\$ 2,836,460	\$ 3,290,928	\$ 3,290,928	\$ 3,290,928	\$ 274,244	\$ -
Equipment Operating	\$ 6,454,728	\$ -	\$ 1,984,088	\$ 1,601,208	\$ 1,302,336	\$ 1,491,840	\$ 95,256	\$ -
Supplies	\$ 8,534,118	\$ -	\$ 2,180,203	\$ 1,568,350	\$ 2,222,402	\$ 2,038,550	\$ 529,613	\$ -
Other	\$ 87,000	\$ -	\$ -	\$ 87,000	\$ -	\$ -	\$ -	\$ -

From Mark Laurenti

Excavation costs do not include

- General operations: mine, shaft, pumps, ventilation
- Overhead functions: office, property maintenance, water consumption, power.
- Mobilization/demobilization
- Waste handling
- EDIA
- Do not triple for 3 caverns.

SUMMARY OF CHAMBER EXCAVATION

	TOTAL	Year 1	Year 2
--	-------	--------	--------

Design (3 Chambers)

	\$ 761,600	\$ 761,600	\$ -
Months	7	7	-
Diamond Drilling ft	10,932 ft	10,932 ft	0
Diamond Drill Costs	\$ 546,600	\$ 546,600	\$ -
Geotechnical Over site	\$ 90,000	\$ 90,000	\$ -
Geotechnical Modeling & Recommendations	\$ 125,000	\$ 125,000	\$ -

Site Set Up (6 Chamber Access)

	\$ 4,514,164	\$ 3,958,652	\$ 555,511
Drift Footage	4,667 ft	4,459 ft	208 ft
Months	8	7	1
Labor	\$ 2,153,632	\$ 1,879,388	\$ 274,244
Equipment Operating	\$ 1,143,072	\$ 952,560	\$ 190,512
Supplies	\$ 1,217,460	\$ 1,126,704	\$ 90,755
Other	\$ -	\$ -	\$ -

Collaboration requesting funds from DUSEL R&D

One time costs



From Mark Laurenti